



Contact characteristics

IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$

A 500


Rated insulation voltage U_i IEC/EN

V 1000

Rated impulse withstand voltage U_{imp}

kV 12

Dimensions

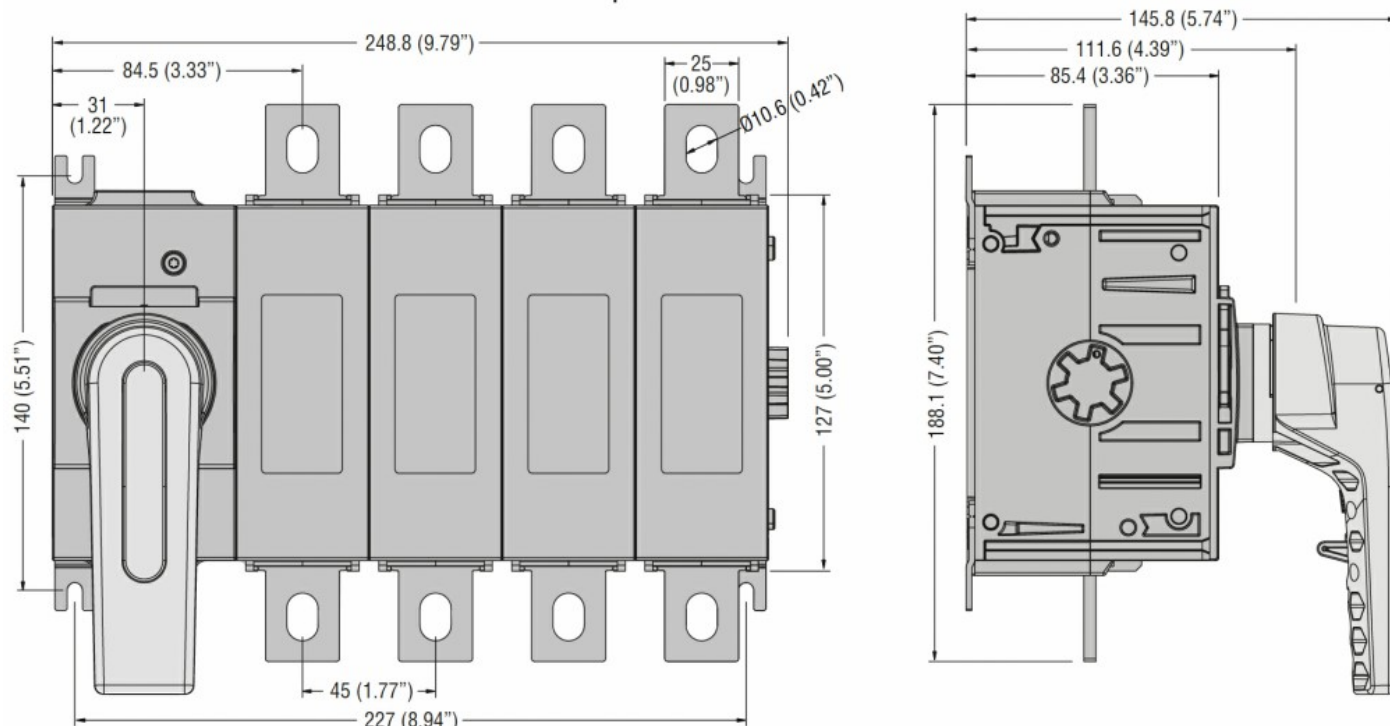

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-3

ETIM classification

ETIM 8.0

EC002498 -
Accessories/spare
parts for low-
voltage switch
technology