

General characteristics

Switching diagram	53 - Changeover switch 3 poles - 2 speed motor starting with separate windings
N° of elements	3
Mounting form	P - Plastic enclosure with black handle

Contact characteristics

Rated insulation voltage U_i	IEC/EN	V	690
	UL/CSA	V	600
Rated impulse withstand voltage U_{imp}		kV	6
Conventional free air thermal current I_{th}	IEC/EN	A	20
	UL/CSA	A	15
Rated operational voltage		V	440
Rated operational impulse voltage		kV	4
Maximum fuse size for short-circuit protection I_n (gG)	10kA	A	20
	15kA	A	20
	25kA	A	20
Rated short time current I_{cw}	1s	kA	250
Conductivity			10/5 mA/V
Operational current I_e IEC/EN	AC1/AC21A		
		A	20
	AC15		
	110V	A	10
	220/230V	A	8
	380/400V	A	6
	660/690V	A	1.5
	Three-phase AC-3		
	220/230V	kW	3.7
Rated operational power in AC	380/440V	kW	5.5
	500/690V	kW	5.5
	Single-phase AC-3		
	110V	kW	0.75
	220/230V	kW	1.8
	380/440V	kW	3
	Three-phase AC23A		
	220/230V	kW	4
	380/440V	kW	7.5
	500/690V	kW	7.5
Rated operational current in DC	Single-phase AC23A		
	110V	kW	0.75
	220/230V	kW	2.2
	380/440V	kW	3.5

ENCLOSED ROTARY CAM SWITCH GX SERIES, CHANGEOVER SWITCH 3 POLES 20A IN
PLASTIC ENCLOSURE 90X90MM WITH BLACK HANDLE

DC21A

48V	A	20
60V	A	20
110V	A	4
220V	A	0.6
440V	A	0.25

DC23A (poles in series)

24V	A	20 (1)
48V	A	20 (2)
60V	A	20 (3)
110V	A	10 (3)
220V	A	8 (4)

DC13

24V	A	20
48V	A	16
60V	A	12
110V	A	1
220V	A	0.4
440V	A	0.15

Power dissipation	W	0.6
-------------------	---	-----

Mechanical features

Terminals screw	M3
-----------------	----

Tightening torque for terminals max	Nm	0.8
-------------------------------------	----	-----

Conductor size

AWG - Rigid cable

min	AWG	20
Max	AWG	12

AWG - Flexible cable

min	AWG	20
Max	AWG	12

Conductor size (IEC) - Flexible cable

min	mm ²	0.5
Max	mm ²	2.5

Conductor size (IEC) - Rigid cable

min	mm ²	0.5
Max	mm ²	2.5

Mechanical life	cycles	1X10 ⁶
-----------------	--------	-------------------

UL technical data

Motor power for direct-on-line control

for three-phase motor

120V	HP	1.5
240V	HP	3
480V	HP	5
600V	HP	5

for single-phase motor

120V	HP	0.75
240V	HP	1.5

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
-----	----	-----

max °C +70

Resistance & Protection

Frontal IP degree IP65

Terminals IP degree IP20


Dimensions

The figure displays four technical drawings of a rotary cam switch:

- Front View (Top Left):** Shows a square enclosure with side length A and A_1 . The mounting hole spacing is N . The central cam mechanism is labeled with 1 .
- Side View (Top Middle):** Shows the profile of the switch with dimensions M (total width), R (cam radius), L (base length), and F (flange thickness).
- Top View (Top Right):** Shows the top of the enclosure with dimensions C (internal width), C_1 (mounting hole spacing), L (base length), and D (flange thickness).
- Bottom View (Bottom Left):** Shows the bottom of the enclosure with dimensions L (base length) and F (flange thickness).

Series	Enclosure size	Number of elements		Dimensions												Cable entry	Protection degree
		L	L1	A	A1	C	C1	D	F	M	N	L	L1				
GX1600	90x90	1-2	3-5	90	90	79	79	4.5	25	19	30	71.3	98.3	4xPG16	IP65		
GX2000		1-2	3-5														
GX16	110x110	1-3	4-7	110	110	98.4	83	4.5	32	21	39.5	85.5	119.5	4xPG21	IP65		
GX20		1-3	4-7														
GX3200		1-2	3-4														
GX4000		1-2	3-4														

Wiring diagrams

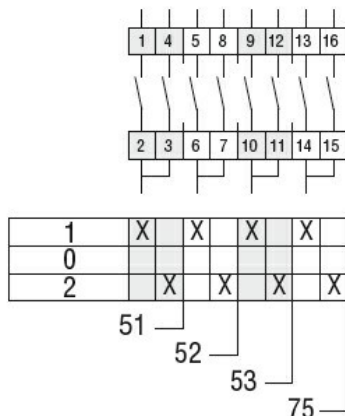

Certifications and compliance

Compliance

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

IEC/EN/BS 61058-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001105 - Off-load switch