

General characteristics

Switching diagram	11 - 3-phase motor reversing switch
N° of elements	3
Mounting form	P25 - Plastic enclosure with red/yellow handle

Contact characteristics


Rated insulation voltage U_i	IEC/EN	V	690
	UL/CSA	V	600
Rated impulse withstand voltage U_{imp}		kV	6
Conventional free air thermal current I_{th}	IEC/EN	A	32
	UL/CSA	A	32
Rated operational voltage		V	440
Rated operational impulse voltage		kV	4
Maximum fuse size for short-circuit protection I_n (gG)	10kA	A	35
	15kA	A	35
	25kA	A	35
Rated short time current I_{cw}	1s	kA	1000
Conductivity			10/5 mA/V
Operational current I_e IEC/EN	AC1/AC21A		
		A	32
	AC15	110V	A 25
		220/230V	A 20
		380/400V	A 10
		660/690V	A 2
	Three-phase AC-3	220/230V	kW 7.5
		380/440V	kW 11
		500/690V	kW 11
	Single-phase AC-3	110V	kW 1.8
		220/230V	kW 3.5
		380/440V	kW 5.5
	Three-phase AC23A	220/230V	kW 8
		380/440V	kW 15
		500/690V	kW 15
	Single-phase AC23A	110V	kW 2.2
		220/230V	kW 3.5
		380/440V	kW 6
Rated operational current in DC	DC21A		
		48V	A 32

		60V	A	32
		110V	A	5
		220V	A	0.8
		440V	A	0.25
DC23A (poles in series)				
		24V	A	32 (1)
		48V	A	32 (2)
		60V	A	32 (3)
		110V	A	15 (3)
		220V	A	12 (4)
DC13				
		24V	A	32
		48V	A	25
		60V	A	14
		110V	A	3
		220V	A	0.5
		440V	A	0.15
Power dissipation			W	1.6
Mechanical features				
Terminals screw				M4
Tightening torque for terminals max			Nm	1.2
Conductor size				
AWG - Rigid cable				
	min	AWG		16
	Max	AWG		8
AWG - Flexible cable				
	min	AWG		16
	Max	AWG		10
Conductor size (IEC) - Flexible cable				
	min	mm ²		1.5
	Max	mm ²		6
Conductor size (IEC) - Rigid cable				
	min	mm ²		1.5
	Max	mm ²		10
Mechanical life			cycles	1X10 ⁶
UL technical data				
Motor power for direct-on-line control				
for three-phase motor				
	120V	HP		3
	240V	HP		7.5
	480V	HP		15
	600V	HP		15
for single-phase motor				
	120V	HP		1.5
	240V	HP		3
Ambient conditions				
Temperature				
Operating temperature				
	min	°C		-25
	max	°C		+55
Storage temperature				
	min	°C		-40
	max	°C		+70
Resistance & Protection				

Frontal IP degree IP65


Terminals IP degree IP20

Dimensions

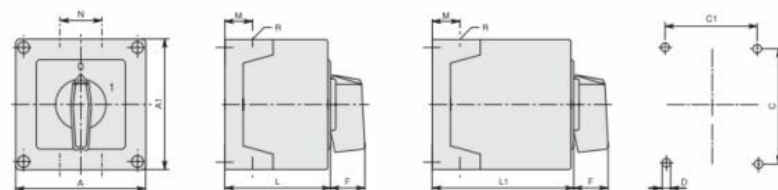

Series	Enclosure size	Number of elements		Dimensions											Cable entry	Protection degree
		L	L1	A	A1	C	C1	D	F	M	N	L	L1			
GX1600	90x90	1-2	3-5	90	90	79	79	4.5	25	19	30	71.3	98.3	4xPG16	IP65	
GX2000		1-2	3-5													
GX16	110x110	1-3	4-7												4xPG21	IP65
GX20		1-3	4-7													
GX3200		1-2	3-4	110	110	98.4	83	4.5	32	21	39.5	85.5	119.5			
GX4000		1-2	3-4													

Wiring diagrams

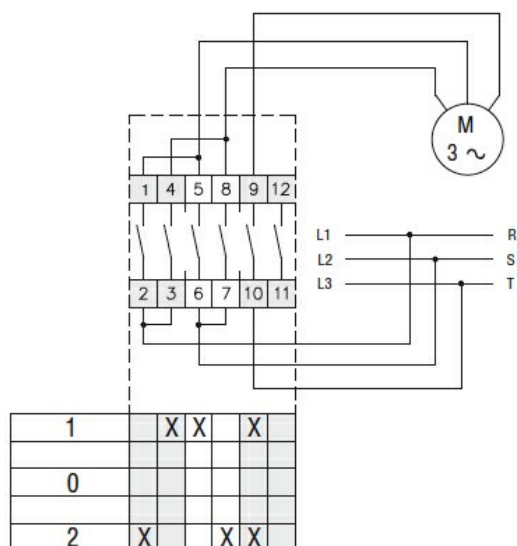

Certifications and compliance

Compliance

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

IEC/EN/BS 61058-1

Certificates

EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete