



Contact characteristics

Rated insulation voltage U_i IEC/EN	V	250
Rated impulse withstand voltage U_{imp}	kV	4


Mechanical features

Max socket terminal tightening torque	Nm	0.6Nm
Socket screw tightening tool (cross / flat blade)		Phillips 1/4.5mm

Conductor section			
AWG/Kcmil			
	min		20
	max		14
IEC			
	min	mm ²	0.5
	max	mm ²	2.5



Fixing	DIN rail or with screws
--------	-------------------------

Dimensions

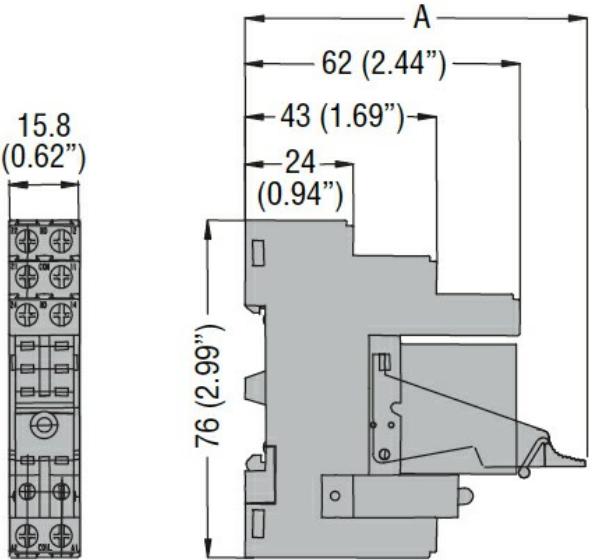

A: 65mm (2.56") con HR3X88
75mm (2.95") con XR5X88

Wiring diagrams

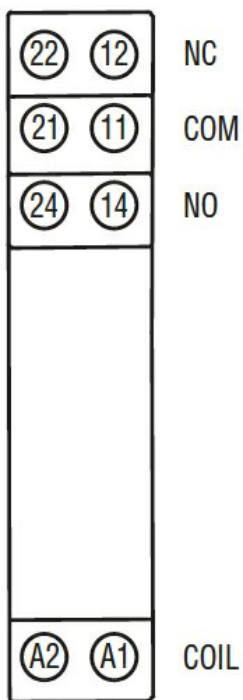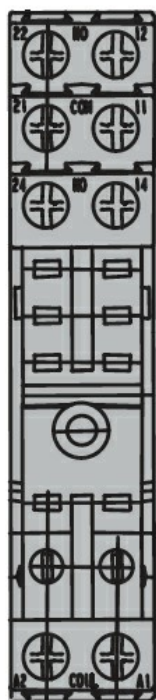

Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

ETIM classification

ETIM 8.0

EC001456 -
Relay socket