




General characteristics				
General characteristics				
Housing Material			Aluminium-zinc alloy	
Rod material			Short cylinder hinge	
Contact characteristics				
Type of contact			2NC Slow action	
Thermal current Ith		A	10	
IEC/EN 60947-5-1 designation			A300 Q300	
Rated insulation voltage Ui		V	440	
Rated impulse withstand voltage Uimp		kV	4	
Short-circuit protection with fuse		Class/A	10 gG/SC QUICK FUSE	
Switching speed				
		min	m/s	0.5
		max	m/s	1.5
IEC Conventional free air thermal current Ith ≤ 40°C			A	10
Resistance per pole (average value)			mΩ	<10
Operations				
Mechanical life			cycles	100000
B10d			cycles	100000
Mechanical operation			cycles/h	3600
Output characteristics				
Mechanical life			cycles	100000
Mechanical features				
Operating head fixing			Locking bayonet insert	
Operating torque				
			Ncm	15
			ozin	21.2
Tightening torque (Max)				
Switch fixing			Nm	2.5
			lbin	22.1
Contact terminals			Nm	0.8
			lbin	7
Body lid screw fixing			Nm	0.8
			lbin	7
Conductor section				
AWG/Kcmil				
		min		16
		max		14

IEC			
	min	mm ²	1.5
	max	mm ²	2.5
Cable connection			Self-releasing screw terminal
Cable entry			M20 on the bottom
Ambient conditions			
Pollution degree			3
Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+70

Dimensions

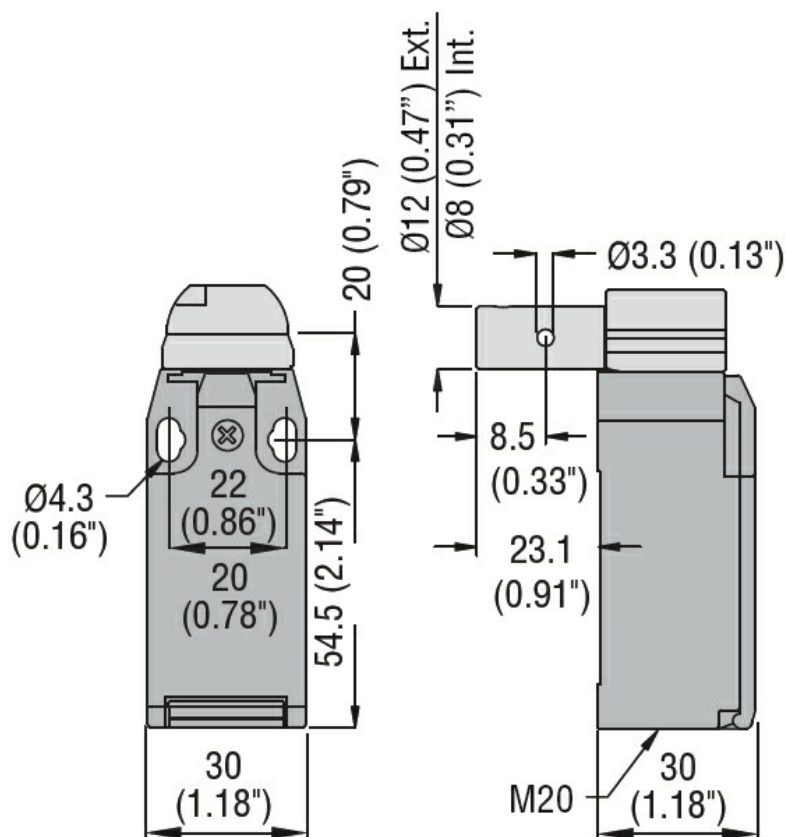

Wiring diagrams

Slow action



2NC

Certifications and compliance

Compliance

CSA C22.2 n° 14
EN 50047
IEC/EN 60204-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch