




General characteristics			
General characteristics			
Housing Material			Aluminium-zinc alloy
Contact characteristics			
Type of contact			2NC Slow action
Thermal current Ith		A	10
IEC/EN 60947-5-1 designation			A300 Q300
Rated insulation voltage Ui		V	440
Rated impulse withstand voltage Uimp		kV	4
Short-circuit protection with fuse		Class/A	10 gG/SC QUICK FUSE
Switching speed			
	min	m/s	0.5
	max	m/s	1.5
IEC Conventional free air thermal current Ith ≤ 40°C		A	10
Resistance per pole (average value)		mΩ	<10
Operations			
Mechanical life		cycles	100000
B10d		cycles	100000
Mechanical operation		cycles/h	3600
Output characteristics			
Mechanical life		cycles	100000
Mechanical features			
Operating head fixing			Locking bayonet insert
Operating torque			
		Ncm ozin	15 21.2
Tightening torque (Max)			
Switch fixing		Nm lbin	2.5 22.1
	Contact terminals	Nm lbin	0.8 7
		Body lid screw fixing	Nm lbin
	Conductor section		
AWG/Kcmil		min	16
		max	14
	IEC	min	mm² 1.5


	max	mm ²	2.5
Cable connection			Self-releasing screw terminal
Cable entry			M20 on the sides
Ambient conditions			
Pollution degree			3
Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+70

Dimensions

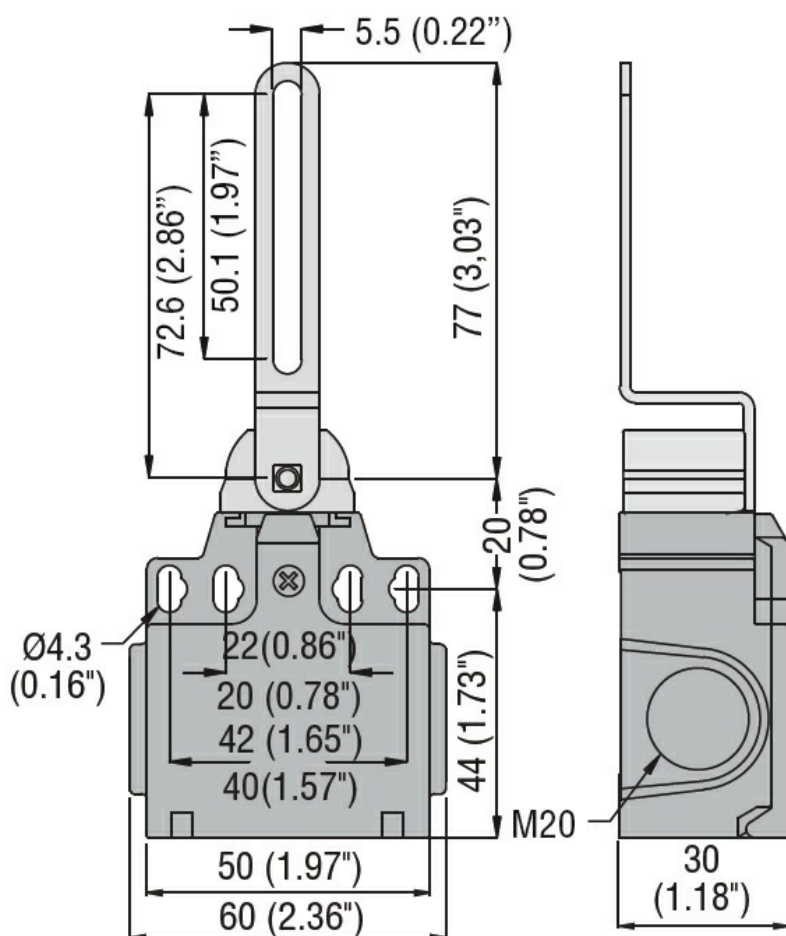

Wiring diagrams

Slow action

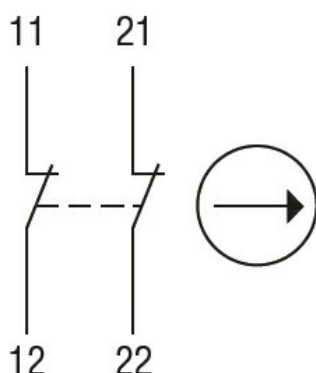

2NC

Certifications and compliance

Compliance

CSA C22.2 n° 14
EN 50047
IEC/EN 60204-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch