



General characteristics

Colour	Grey
Contact configuration	1NO+1NO
IEC degree of protection	IP65

Electrical characteristics

Rated operating current	mA	1...100
Supply voltage (DC)	V	19.2...28.8V
Maximum power consumption	mW	250

Operations

Electrical life	cycles	1.000.000
B10d	cycles	1.300.000

Mechanical features

Connection			4-pin M12 connector
Fixing			For 40mm profile rails
Weight		g	121


UL technical data

UL degree of protection	Type 1
-------------------------	--------

Ambient conditions

Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+60
Storage temperature			
	min	°C	-40
	max	°C	+80

Dimensions

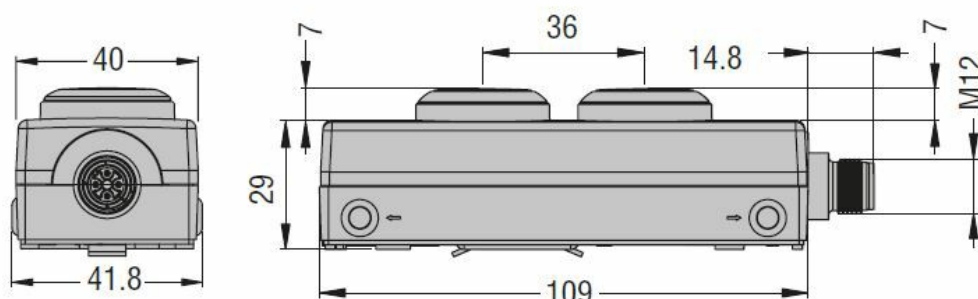

Wiring diagrams

Certifications and compliance

Compliance	
	CSA C22.2 No. 60947-1-13
	CSA C22.2 No. 60947-5-1-14
	IEC/EN/BS 60947-5-1
	UL 60947-1

UL 60947-5-1

UL508A

Certificates

cURus