



### General characteristics

Colour	Grey with red mushroom		
Type of positions	Momentary		
Resistance value	KΩ	≤0.025	
Material	PC-ABS for button and control station. PA66 for plastic operator frame		
IEC degree of protection	IP65		

### Electrical characteristics

Rated insulation voltage $U_i$ IEC/EN	V	690	
IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A	10	
Rated frequency	Hz	50	
Conductivity	5V 10mA		
UL/CSA and IEC/EN 60947-5-1 designation	A600 Q300		
Operating current AC15	12V	A	6
	24V	A	6
	48V	A	6
	120V	A	6
	240V	A	3
	400V	A	1.9
	480V	A	1.5
	500V	A	1.4
Operating current DC13	600V	A	1.2
	12V	A	3
	24V	A	3
	48V	A	1.5
	125V	A	0.55
	250V	A	0.27
	440V	A	0.15
	500V	A	0.13
600V	A	0.1	

### Mechanical features

Operating force	kg-lb	≤2.6Nm	
Mechanical life	cycles	1000000	
Tightening torque for terminals max	Nm	0.5 ... 0.8 Nm	
Conductor section	IEC	min	mm <sup>2</sup> 0.5
		max	mm <sup>2</sup> 2.5
		Operating position	allowable

**Ambient conditions**

Temperature



Operating temperature

min	°C	-25
max	°C	+75


Storage temperature

min	°C	-40
max	°C	+85

**Dimensions**

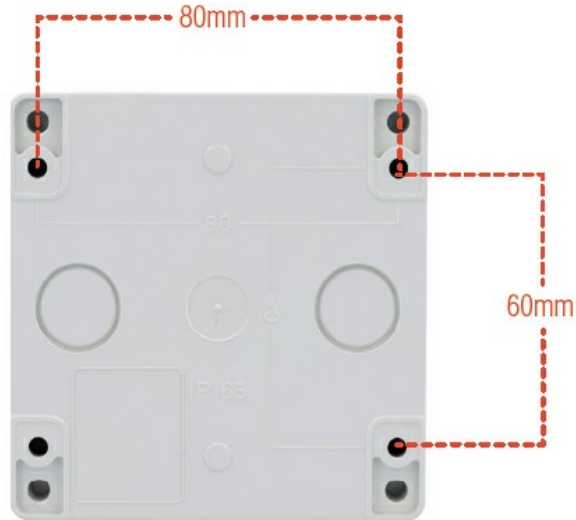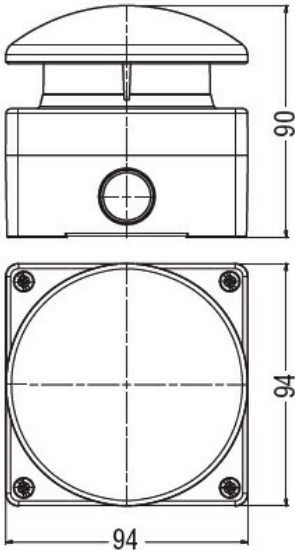

**Wiring diagrams**



**Certifications and compliance**

Compliance

IEC60947-5-1

Certificates

/

**ETIM classification**

ETIM 8.0

EC002034 -  
Emergency stop  
complete