



#### General characteristics

|                          |                          |
|--------------------------|--------------------------|
| Colour                   | Red                      |
| Type of positions        | Mushroom head pushbutton |
| Material                 | Polyamide                |
| IEC degree of protection | IP66, IP67 and IP69K     |

#### Mechanical features

|                                   |        |                |
|-----------------------------------|--------|----------------|
| Operating force                   | kg-lb  | <0.5Kg / 1.1lb |
| Mechanical life - Latch actuators | cycles | 300000         |
| Mounting adapter                  |        | LPXAU120       |
| Weight                            | g      | 83             |

#### UL technical data

|                         |                              |
|-------------------------|------------------------------|
| UL degree of protection | Type1, 2, 3R, 4, 4X, 12, 12K |
|-------------------------|------------------------------|

#### Ambient conditions

##### Temperature


##### Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +70 |

##### Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +85 |

#### Dimensions

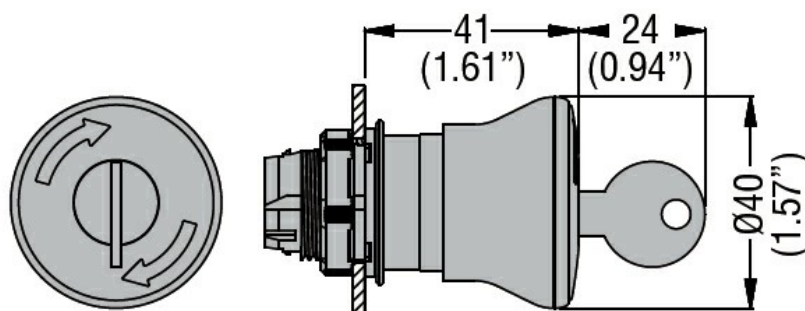

#### Certifications and compliance

##### Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-5-1  
UL508

##### Certificates

CCC  
cULus  
EAC  
RINA  
UL

MUSHROOM HEAD PUSHBUTTON ACTUATOR Ø22MM PLATINUM SERIES CHROMED PLASTIC, LATCH, TURN KEY TO RELEASE, Ø40MM. FOR EMERGENCY STOPPING. ISO 13850. RED. DIFFERENT KEY CODE

ETIM classification

ETIM 8.0

EC001038 -  
Front element for  
mushroom push-  
button