



General characteristics

Material	Polyamide
IEC degree of protection	IP65 on front and IP20 on rear

Electrical characteristics

Rated insulation voltage U_i IEC/EN	V	24VAC
Contact resistance	mΩ	≤40

Mechanical features

Weight	g	26
--------	---	----


UL technical data

UL degree of protection	1, 2, 3R, 4, 4X, 12, 12K on front
-------------------------	--------------------------------------

Ambient conditions

Temperature			
Operating temperature	min	°C	-25
	max	°C	+70
Storage temperature	min	°C	-40
	max	°C	+85

Dimensions

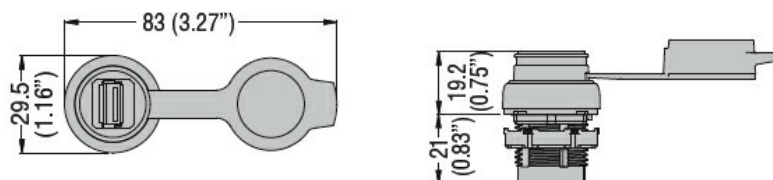

Certifications and compliance

Compliance	CSA C22.2 n° 14
	IEC/EN/BS 60947-1
	IEC/EN/BS 60947-5-1
	UL508
Certificates	cULus
	EAC

ETIM classification

ETIM 8.0	EC002780 - Interface module
----------	--------------------------------