



General characteristics

Type of positions	Potentiometer
Resistance value	KΩ 2.5
Material	Polyamide - Resistive material: cermet
IEC degree of protection	IP66, IP67; IP96K on front and IP20 on rear

Electrical characteristics

Rated insulation voltage Ui IEC/EN	V 250VAC
Rated impulse withstand voltage Uimp	kV 4
Max power	W 1

Mechanical features

Mechanical travel	° 290
Weight	g 40

UL technical data

UL degree of protection	1, 2, 3R, 4, 4X, 12, 12K on front
-------------------------	-----------------------------------


Ambient conditions

Temperature	Operating temperature	min °C -25
		max °C +70
	Storage temperature	min °C -40
		max °C +85


Resistance & Protection

Resistance tolerance	% ±10%
----------------------	--------

Dimensions

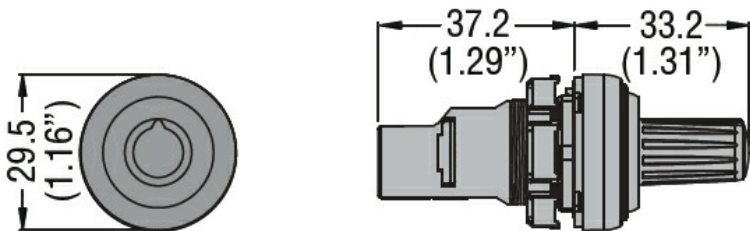

Wiring diagrams

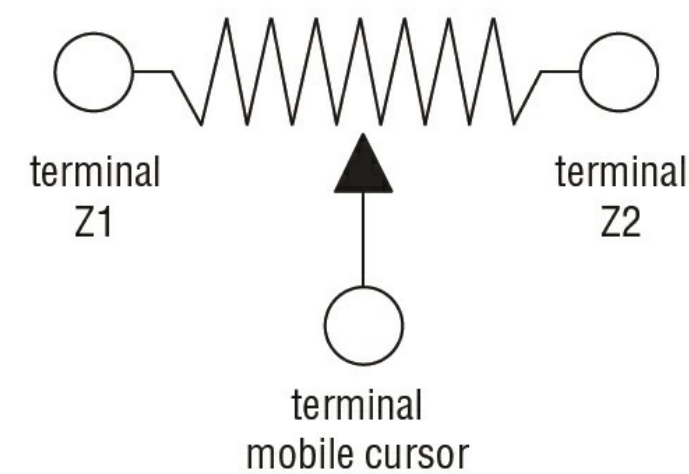

Certifications and compliance

Compliance	CSA C22.2 n° 14
	IEC/EN/BS 60947-1
	IEC/EN/BS 60947-5-1
	UL508

Certificates	CCC
	cULus
	EAC

ETIM classification

ETIM 8.0	EC001027 - Potentiometer for command devices
----------	---