



#### General characteristics

|                          |                      |
|--------------------------|----------------------|
| Colour                   | Blue                 |
| Type of positions        | 1 > 0 < 2            |
| Material                 | Polyamide            |
| IEC degree of protection | IP66, IP67 and IP69K |

#### Mechanical features

|                  |        |                          |
|------------------|--------|--------------------------|
| Mechanical life  | cycles | 1000000                  |
| Fixing           |        | Without mounting adapter |
| Mounting adapter |        | LPXAU120                 |
| Weight           | g      | 25                       |


#### UL technical data

|                         |                              |
|-------------------------|------------------------------|
| UL degree of protection | Type1, 2, 3R, 4, 4X, 12, 12K |
|-------------------------|------------------------------|

#### Ambient conditions

|             |                       |    |     |
|-------------|-----------------------|----|-----|
| Temperature | Operating temperature |    |     |
|             | min                   | °C | -25 |
|             | max                   | °C | +70 |
|             | Storage temperature   |    |     |
|             | min                   | °C | -40 |
|             | max                   | °C | +85 |

#### Dimensions

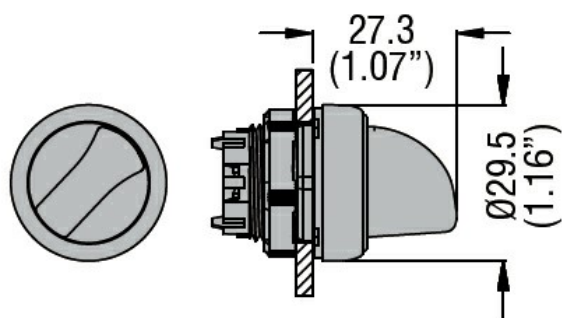

#### Certifications and compliance

|              |                     |
|--------------|---------------------|
| Compliance   | CSA C22.2 n° 14     |
|              | IEC/EN/BS 60947-1   |
|              | IEC/EN/BS 60947-5-1 |
|              | UL508               |
|              |                     |
| Certificates | CCC                 |
|              | cULus               |
|              | EAC                 |
|              | RINA                |
|              |                     |

ETIM classification

ETIM 8.0

EC000222 -  
Front element for  
selector switch