




General characteristics	
Colour	Transparent
Type of positions	Flush pushbutton
Material	Aluminium and zinc alloy for the metal part, polyamide for plastic parts
IEC degree of protection	IP66, IP67 and IP69K

Mechanical features	
Mechanical life - Push-Push actuators	cycles 500000
Fixing	Without mounting adapter
Mounting adapter	LPXAU120M

UL technical data	
UL degree of protection	Type1, 2, 3R, 4, 4X, 12, 12K

Ambient conditions				
Temperature	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
max		°C	+85	

Dimensions

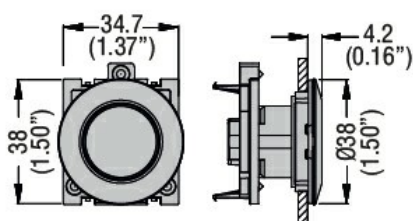

Certifications and compliance	
Compliance	CSA C22.2 n° 14
	IEC/EN/BS 60947-1
	IEC/EN/BS 60947-5-1
	UL508
Certificates	cULus

ETIM classification	
ETIM 8.0	EC000221 - Front element for push button