LPFS332R3433E

SELECTOR SWITCH ACTUATOR KEY Ø30MM PLATINUM SERIES FLAT METAL, 3 POSITION, 1 - 0 - 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 1



General characteristics

Colour	Black
Type of positions	1 - 0 - 2, key extraction in 1 and 0 and 2
Material	Aluminium and zinc alloy for the metal part, polyamide for plastic parts
IEC degree of protection	IP66, IP67 and IP69K

Mechanical features

Mechanical life	cycles	1000000
Fixing		Without mounting adapter
Mounting adapter		LPXAU120M

UL technical data


UL degree of protection	Type1, 2, 3R, 4, 4X, 12, 12K

Ambient conditions

Temperature

Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+85

Dimensions

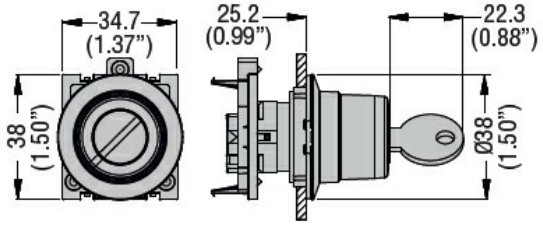

Key

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

cULus

ETIM classification

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

LPFS332R3433E

SELECTOR SWITCH ACTUATOR KEY Ø30MM PLATINUM SERIES FLAT METAL, 3 POSITION, 1 - 0 - 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 1

ETIM 8.0

EC002611 - Control switch

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding