LPFS332R621E

SELECTOR SWITCH ACTUATOR KEY Ø30MM PLATINUM SERIES FLAT METAL, 3 POSITION, 1 - 0 - 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 1



General characteristics

Colour			Black
Type of positions			1 - 0 - 2, key extraction in 1 and 0 and 2
Material			Aluminium and zinc alloy for the metal part, polyamide for plastic parts
IEC degree of protection			IP66, IP67 and IP69K

Mechanical features

Mechanical life		cycles	1000000
Fixing			Without mounting adapter
Mounting adapter			LPXAU120M


UL technical data

UL degree of protection			Type1, 2, 3R, 4, 4X, 12, 12K

Ambient conditions

Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
		max	°C	+85

Dimensions

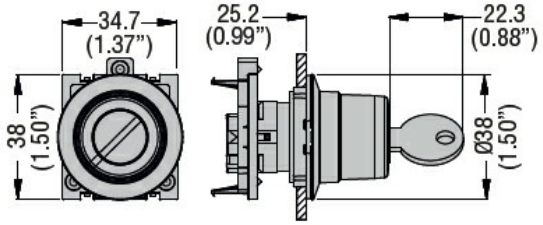

Certifications and compliance

Compliance		
	CSA C22.2 n° 14	
	IEC/EN/BS 60947-1	
	IEC/EN/BS 60947-5-1	
	UL508	
Certificates		
	cULus	

ETIM classification

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

LPFS332R621E

SELECTOR SWITCH ACTUATOR KEY Ø30MM PLATINUM SERIES FLAT METAL, 3 POSITION, 1 - 0 - 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 1

ETIM 8.0

EC002611 - Control switch

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding