# LPFS350R3433E

SELECTOR SWITCH ACTUATOR KEY Ø30MM PLATINUM SERIES FLAT METAL, 3 POSITION, 1 > 0 - 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 0



## General characteristics

| | | | |
|---|---|---|---|
| Colour | | | Black |
| Type of positions | | | 1 > 0 - 2, key extraction in 0 |
| Material | | | Aluminium and zinc alloy |
| IEC degree of protection | | | IP66, IP67 and IP69K |

## Mechanical features

| | | | |
|---|---|---|---|
| Mechanical life | | cycles | 1000000 |
| Fixing | | | Without mounting adapter |
| Mounting adapter | | | LPXAU120M |


## UL technical data

| | | | |
|---|---|---|---|
| UL degree of protection | | | Type1, 2, 3R, 4, 4X, 12, 12K |

## Ambient conditions

| | | | |
|---|---|---|---|
| Temperature | | | |
| | Operating temperature | | |
| | | min °C | -25 |
| | | max °C | +70 |
| | Storage temperature | | |
| | | min °C | -40 |
| | | max °C | +85 |

## Dimensions

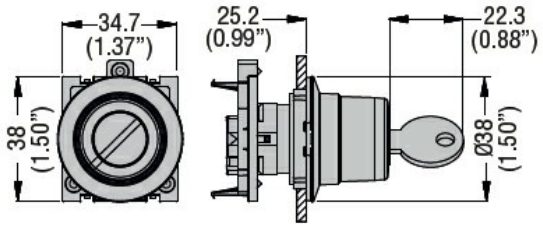


Key

## Certifications and compliance

| | | |
|---|---|---|
| Compliance | | |
| | CSA C22.2 n° 14 | |
| | IEC/EN/BS 60947-1 | |
| | IEC/EN/BS 60947-5-1 | |
| | UL508 | |
| Certificates | | |
| | cULus | |

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC002611 - Control switch |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding