



General characteristics

Material	Aluminium and zinc alloy for metal parts and polyamide for plastic parts. Sealing boot is NBR rubber
IEC degree of protection	IP66

Electrical characteristics

Rated insulation voltage U_i IEC/EN	V	690	
IEC Conventional free air thermal current $I_{th} \leq 40^\circ\text{C}$	A	10	
UL/CSA and IEC/EN 60947-5-1 designation		A300 Q300	
Operating current AC15	12V	A	6
	24V	A	6
	48V	A	6
	120V	A	6
	240V	A	3
	Operating current DC13	12V	A
24V		A	0.55
48V		A	0.55
125V		A	0.55
250V		A	0.27
Contact resistance		mΩ	≤20

Mechanical features

Mechanical life	cycles	1000000
Tightening torque for terminals max	Nm	1
Terminals screw		Clamp screw with washer
Mounting adapter		Included with contacts


UL technical data

UL degree of protection	Type 1, 2, 3R, 4, 4X, 12, 12K
-------------------------	-------------------------------

Ambient conditions

Temperature	Operating temperature	min	°C	-25
		max	°C	+60
		Storage temperature		
	min	°C	-40	
	max	°C	+70	

Dimensions

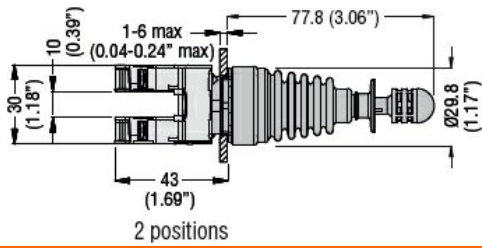

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC000632 -
Control switch,
Joystick