



Operations

Electrical life	cycles	1000000
-----------------	--------	---------

Mechanical features

Operating force	kg-lb	≤0.5Kg/1.1lb
Tightening torque for terminals max	Nm	1
Terminals screw		Screw

Conductor section

AWG/kcmil conductor section

max 14

IEC

max mm² 1 or 2 / 2.5

Mounting adapter

LPXAU120

Weight

g 29

Ambient conditions

Temperature


Operating temperature

min °C -25
max °C +70

Storage temperature

min °C -40
max °C +85

Wiring diagrams

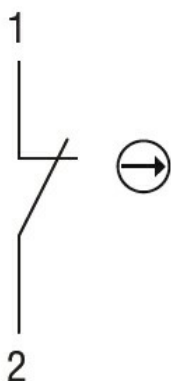

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

CCC
cULus
EAC

RINA
UL

ETIM classification

ETIM 8.0	EC002498 - Accessories/spare parts for low- voltage switch technology
----------	---