



### General characteristics

|        |        |
|--------|--------|
| Colour | Yellow |
|--------|--------|

### Electrical characteristics

|                     |    |         |
|---------------------|----|---------|
| Rated frequency     | Hz | 50-60   |
| Supply voltage (AC) | V  | 12...30 |

### Operations

|                 |       |        |
|-----------------|-------|--------|
| Electrical life | hours | 100000 |
|-----------------|-------|--------|

### Mechanical features

#### Conductor section

AWG/kcmil conductor section

max 14

IEC

max mm<sup>2</sup> 1 or 2 / 2.5

#### Mounting adapter

LPXAU120

#### Weight

g 16

### Ambient conditions

#### Temperature

Operating temperature


min °C -25  
max °C +70

Storage temperature


min °C -40  
max °C +85

### Dimensions

Mounting position on the LPZ control station base

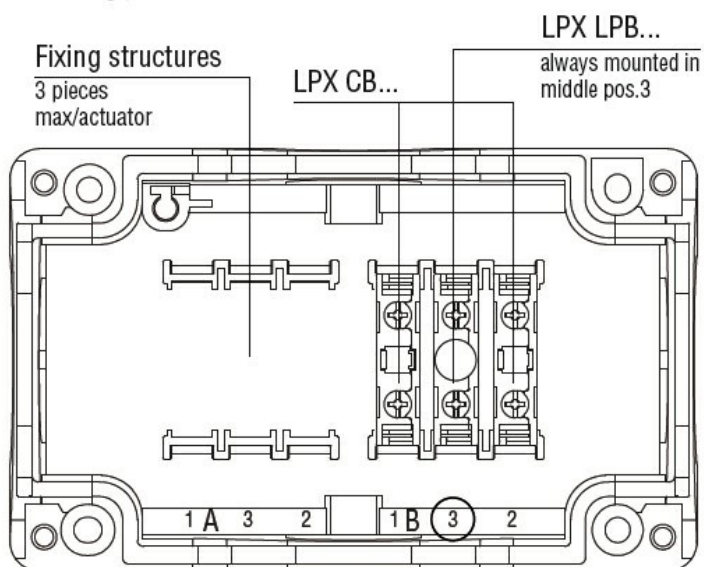

### Wiring diagrams

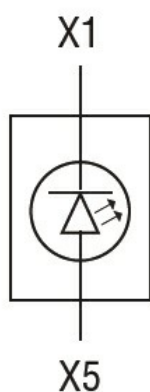

## Certifications and compliance

### Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

### Certificates

CCC

cULus

EAC

RINA

UL

## ETIM classification

ETIM 8.0

EC000204 -  
Lamp holder  
block for control  
circuit devices