



#### General characteristics

|                          |                   |
|--------------------------|-------------------|
| Colour                   | Grey              |
| Material                 | Polycarbonate     |
| IEC degree of protection | IP66, IP67, IP69K |

#### Mechanical features

|                                     |    |     |
|-------------------------------------|----|-----|
| Tightening torque for terminals max | Nm | 1.8 |
| Weight                              | g  | 152 |

#### UL technical data

|                         |                      |
|-------------------------|----------------------|
| UL degree of protection | 1, 2, 3R, 4, 4X, 12K |
|-------------------------|----------------------|

#### Ambient conditions

Temperature


Operating temperature

|     |    |     |
|-----|----|-----|
| min | °C | -25 |
| max | °C | +70 |

Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +85 |

#### Dimensions

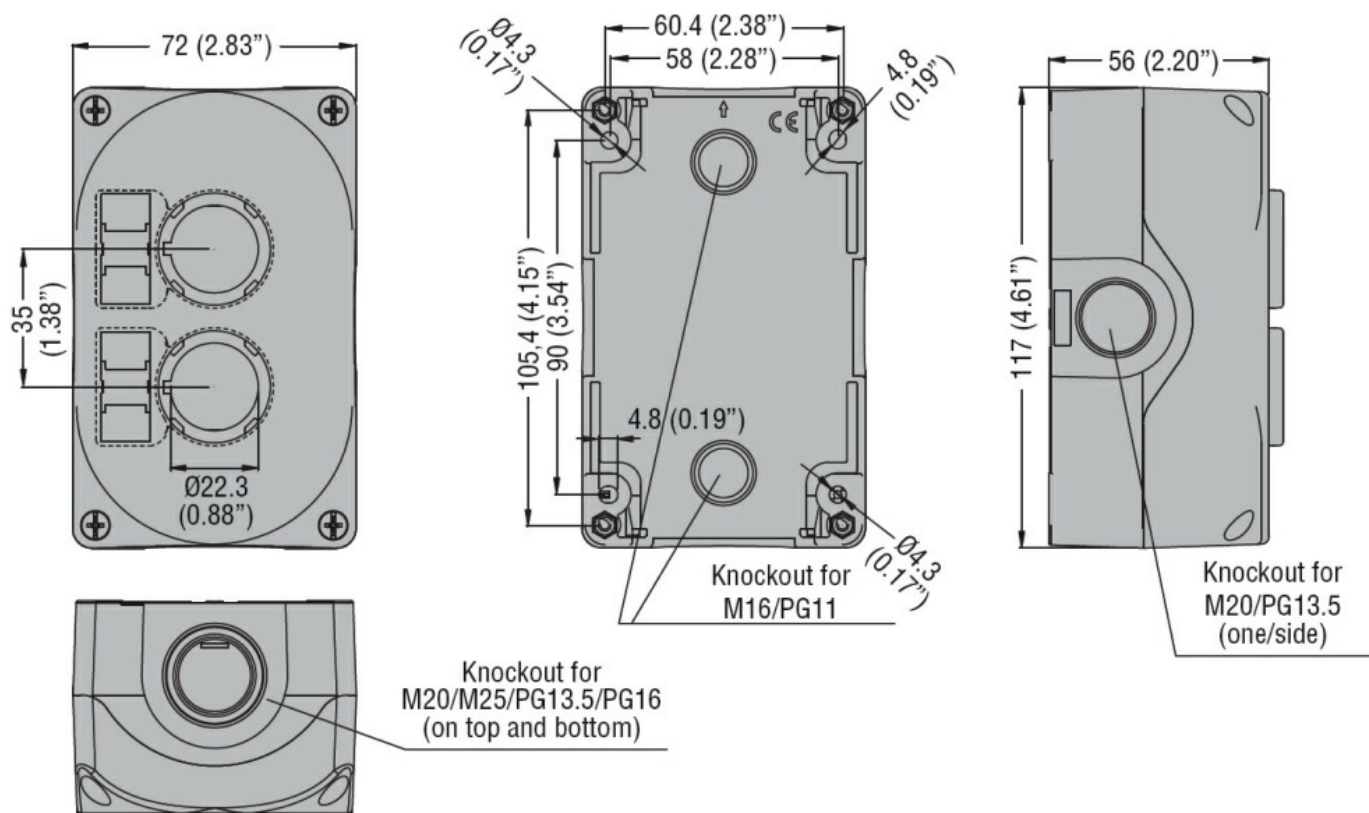

#### Certifications and compliance

Compliance

CONTROL STATION, EMPTY WITH NO ACTUATORS, FOR 2 ACTUATORS. GREY COVER

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC000200 -  
Enclosure for  
control circuit  
devices