



Power supply

Rated auxil. supply voltage		24VDC
Operating voltage range		20.4...28.8VDC
Average current consumption	mA	125
Power consumption Max	W	4.5

Digital inputs

Number of digital input	Nr.	6 + 2 digital/analog
Rated voltage	V	24VDC
Input signals	State 0 (OFF) State 1 (ON)	<5VDC >15VDC
Response time	0 to 1 (OFF-ON) 1 to 0 (ON-OFF)	4ms (0.5ms for high speed) 4ms (0.3ms for high speed)

Analog inputs

Number of analog input	Nr.	2 digital/analog
Analog input type		Voltage inputs
Inputs signal range	V	0...10
Resolution		0.01V
Bit of conversion	bit	10
Current consumption at	10VDC	mA <0.17mA
Input impedance	kΩ	>40
Admissible overload	VDC	28
Sampling time	ms	5...20ms(LADDER), 2...10ms (FBD)
Maximum cable length	m / ft	≤30m/98ft (shielded wire)

Digital outputs

Number of digital output	Nr.	4
type		Relay


System resources

Display		LCD display, 4 lines x 16 characters
---------	--	--


Connections

Terminals type		Screw
Tightening torque for terminals	max	Nm 0.6
	Max	lbft 0.4
Conductor section	AWG/Kcmil	
	min	26

IEC	max		14
	min	mm²	0.14
	max	mm²	2.5
Ambient conditions			
Temperature			
Operating temperature	min	°C	-20
	max	°C	+55
Storage temperature	min	°C	-40
	max	°C	+70
Relative humidity		%	20...90% without condensation
Housing			
Mounting		35mm DIN rail or screw fixing (M4x20mm)	
Degree of protection		IP20	
Dimensions (W x H x D)		mm	72 x 106 x 59.6
Weight		g	241
Dimensions			

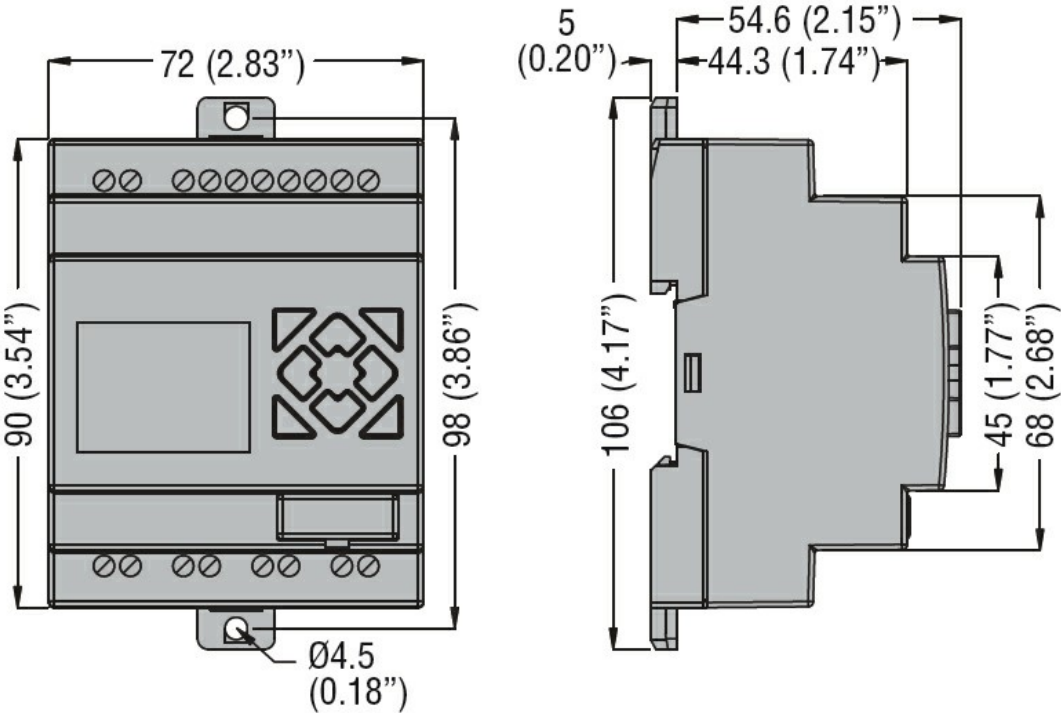

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 142

IEC/EN 61131-2

UL508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC001417 -
Logic module