



Power supply

Rated auxil. supply voltage	24VDC
Operating voltage range	20.4...28.8VDC
Average current consumption	mA 70

Digital inputs

Number of digital input	Nr.	4
Rated voltage	V	24VDC
Input signals	State 0 (OFF) State 1 (ON)	<5VDC >15VDC

Digital outputs

Number of digital output	Nr.	4
type		Transistor

Connections

Terminals type	Screw
----------------	-------


Ambient conditions

Temperature	Operating temperature	min	°C	-20
		max	°C	+55
	Storage temperature	min	°C	-40
		max	°C	+70
Relative humidity			%	<90% (non condensing)


Housing

Mounting	35mm DIN rail or screw fixing (M4x15mm)
Degree of protection	IP20
Dimensions (W x H x D)	mm 38 x 106 x 59.3
Weight	g 151

Dimensions

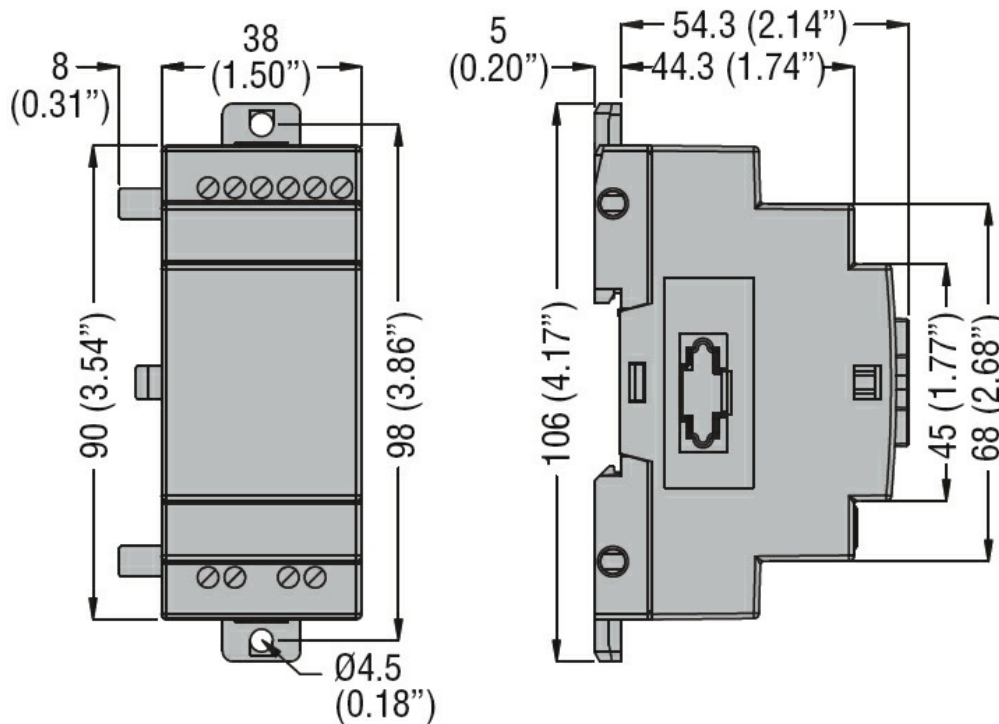

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 142
IEC/EN 61131-2
UL508

Certificates

cULus
EAC

ETIM classification

ETIM 8.0

EC001419 - PLC
digital I/O-module