





Power supply						
Rated auxil. supply voltage			24VDC			
Operating voltage range			20.4...28.8VDC			
Avarage current consumption			mA	70		
Communications						
Baud rate			bps	4800... 38400bps		
Termination resistance			Integrated 120Ω			
Connections						
Terminals type			Screw			
Tightening torque for terminals			max	Nm	0.6	
			Max	lbft	5.4	
Conductor section						
AWG/Kcmil			min	26		
			max	16		
IEC			min	mm²	0.14	
			max	mm²	1.5	
Ambient conditions						
Temperature						
Operating temperature			min	°C	-20	
			max	°C	+55	
Storage temperature			min	°C	-40	
			max	°C	+70	
Relative humidity			%			<90% (non condensing)
Housing						
Mounting			35mm DIN rail or screw fixing (M4x15mm)			
Degree of protection			IP20			
Dimensions (W x H x D)			mm	38 x 106 x 59.3		
Weight			g	134		
Dimensions						

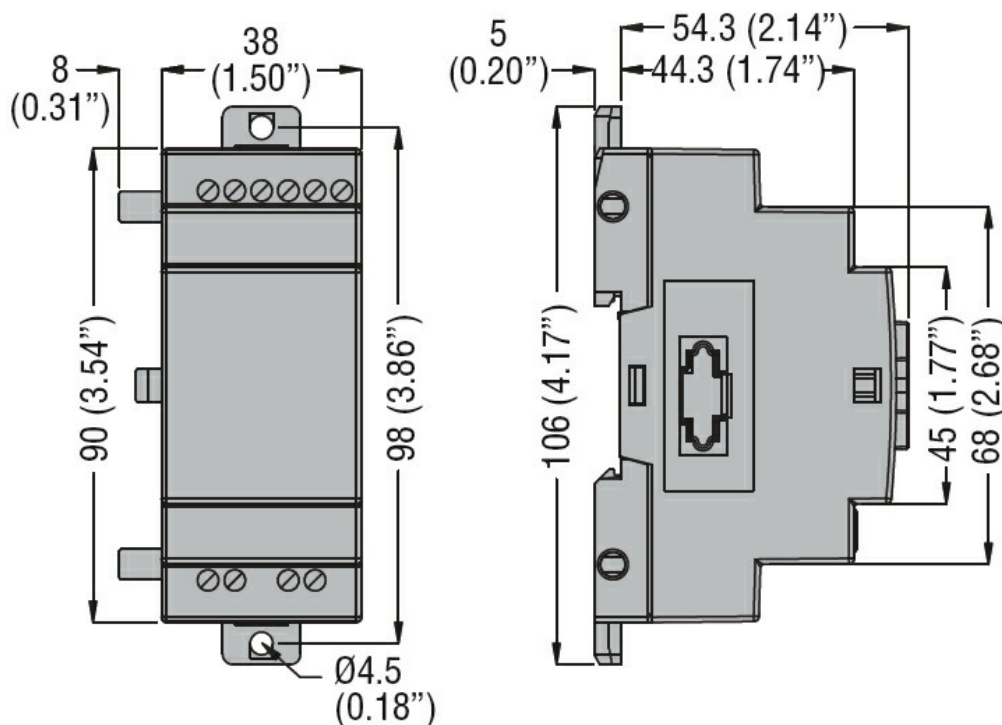

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 142

IEC/EN 61131-2

UL508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC001423 - PLC
communication
module