





Power supply				
Rated auxil. supply voltage				24VDC
Operating voltage range				20.4...26.4VDC (-15%...+10%)
Power consumption Max		W		1.9
System resources				
Display				4.3" monochrome LCD display, green background + keypad with 24 keys
Colors				monochrome, olive background
Resolution				192 x 64 pixel
Touchscreen				No
Communications				
Type of communication port				RS232 and RS485
Connections				
Terminals type				Screw
Tightening torque for terminals				
		max	Nm	1.8
		Max	lbft	10.4
Conductor section				
	AWG/Kcmil			
		min		22
		max		12
	IEC			
		min	mm ²	0.4
		max	mm ²	3.3
Ambient conditions				
Temperature				
	Operating temperature			
		max	°C	+55
	Storage temperature			
		min	°C	-40
		max	°C	+70
Relative humidity			%	10...95% without condensation
Maximum Pollution degree				2
Housing				
Degree of protection				IP65

Dimensions (W x H x D)	mm	179.5 x 101.5 x 33
Weight	g	200

Dimensions

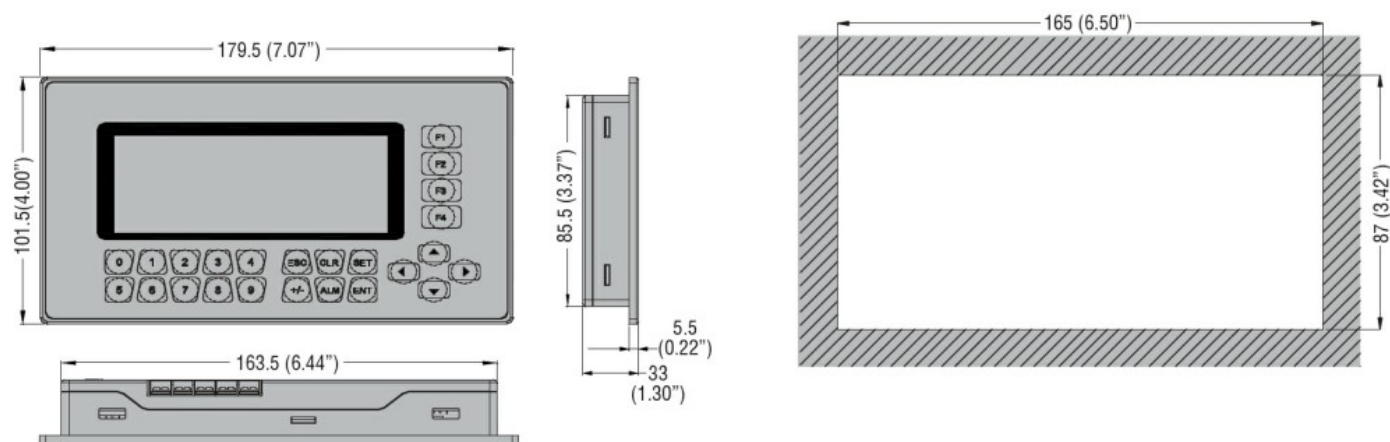

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 142
IEC/EN 61131-2
UL508

Certificates

cULus
EAC

ETIM classification

ETIM 8.0

EC001412 -
Graphic panel