



General characteristics

Diameter	mm - inch	70 / 2.75
Supply voltage (AC)	V	110...230
IEC degree of protection		IP65
Power consumption	VA	1


Mechanical features

Terminals screw	Spring terminals		
Conductor section			
	AWG/Kcmil		
		min	16
		max	24
	IEC		
		min	mm ² 0.25
		max	mm ² 1.5
Weight	g	277	


Ambient conditions

Temperature			
	Operating temperature		
		min	°C -30
		max	°C +50

Dimensions

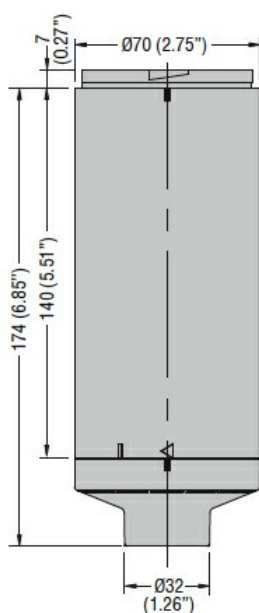

Wiring diagrams

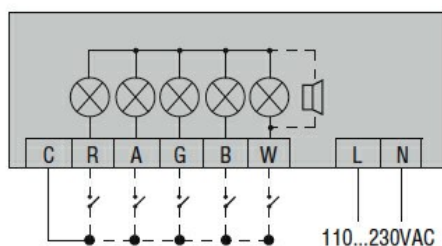

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC001154 -
Stand for signal
tower without
tube