



Counterweights

Counterweight	Internal
Activation angle	15°

Relay outputs

Number of relays	Nr.	1
Contact arrangement		1 changeover contact C/O-SPDT
Rated operational voltage AC (IEC)	VAC	250
Contact ratings		AC1 10A 250VAC AC15 4A 250VAC

Connections

Maximum cable length	m / ft	10
----------------------	--------	----


Ambient conditions

Temperature	Operating temperature			
	min	°C	0	
	max	°C	+50	
	Storage temperature			
	min	°C	-20	
	max	°C	+80	
Maximum operating pressure		bar	5	
Maximum installation depth		m	50	

Housing

Cable material	Neoprene H07 RN-F3X1
Float casing material	Polypropylene
IEC degree of protection	IP68
Weight	g1860

Dimensions

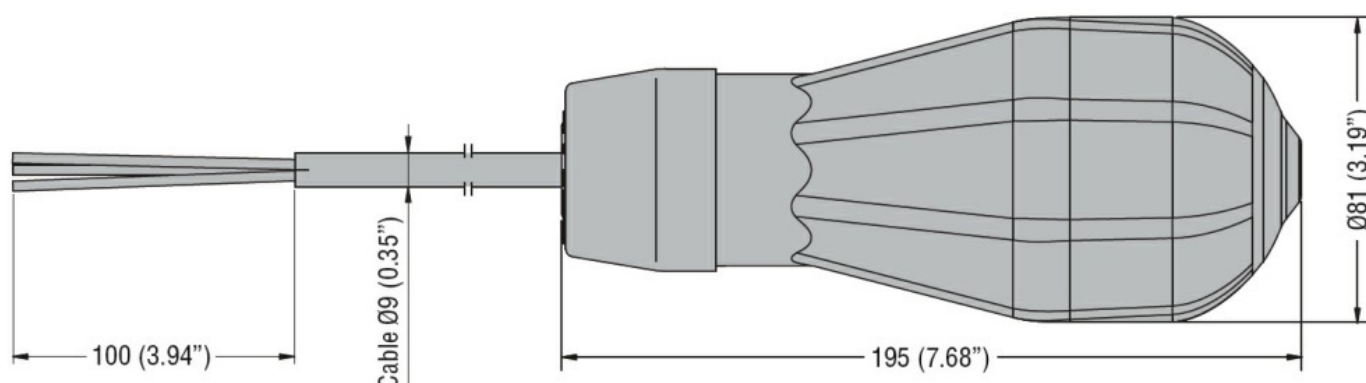

Certifications and compliance

Compliance

IEC/EN 60730-1
IEC/EN 60730-2-15

Certificates

TÜV-SUD

ETIM classification

ETIM 8.0

EC001447 - (Fill)
level monitoring
relay