



Counterweights

Counterweight	External (provided with the float switch)		
Activation angle	45°		

Relay outputs

Number of relays	Nr.	1	
Contact arrangement		1 changeover contact C/O-SPDT	
Rated operational voltage AC (IEC)	VAC	250	
Contact ratings		AC1 10A 250VAC AC15 8A 250VAC	

Connections

Maximum cable length	m / ft	15
----------------------	--------	----


Ambient conditions

Temperature			
	Operating temperature	max	°C +50
	Storage temperature	max	°C 80
Maximum operating pressure	bar	3	
Maximum installation depth	m	30	

Housing

Cable material	Neoprene H07 RN-F3X1		
Float casing material	Polypropylene		
IEC degree of protection	IP68		
Weight	g	2080	

Dimensions

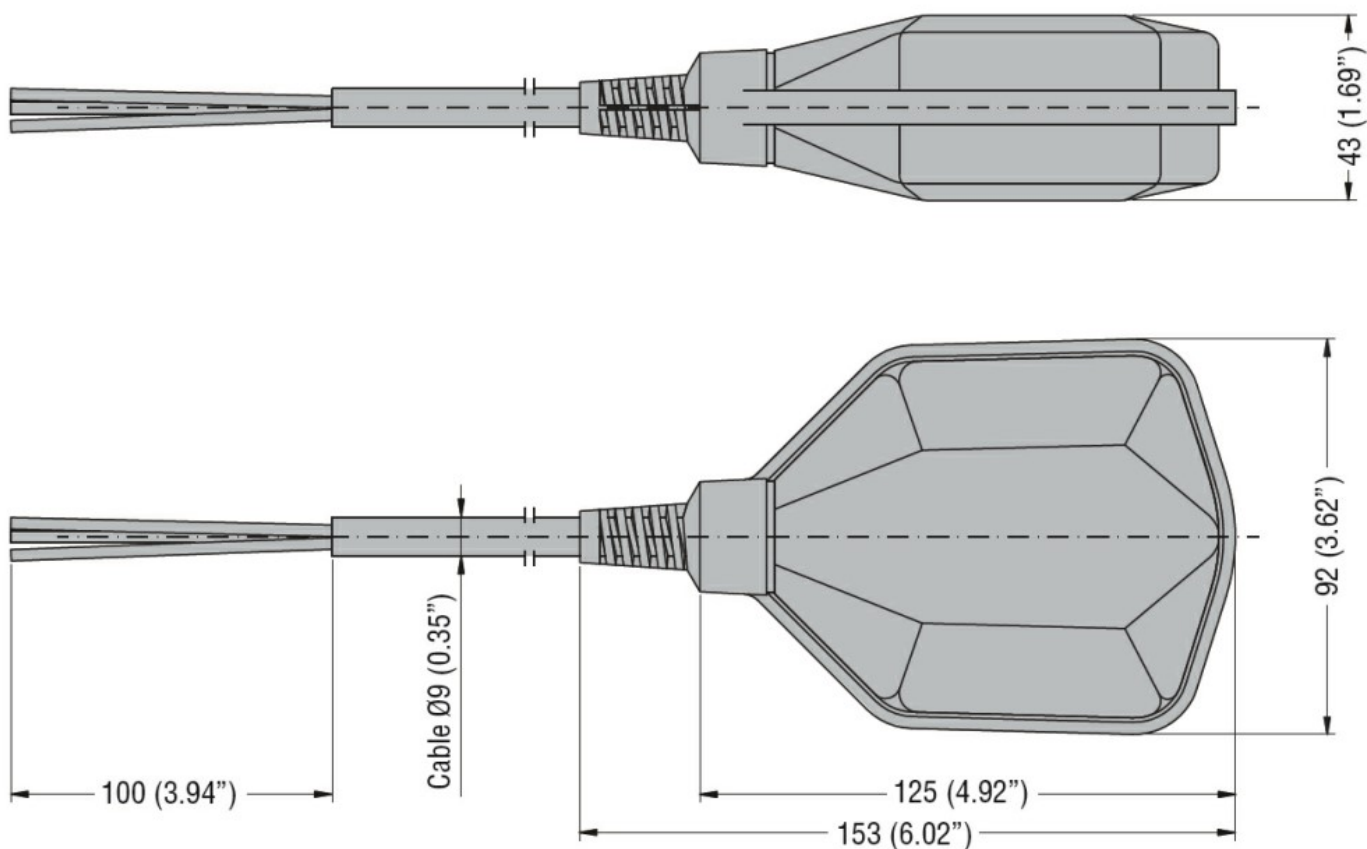

Certifications and compliance

Compliance

IEC/EN 60730-1

IEC/EN 60730-2-15

Certificates

TÜV-SUD

ETIM classification

ETIM 8.0

EC001447 - (Fill)
level monitoring
relay