

DIRECT-ON-LINE-STARTER, 0.6...1A (0.18...0.25KW AT 400V), IP65, CONTACTOR COIL VOLTAGE 24VAC 50/60HZ, NON-METALLIC ENCLOSURE, WITH THERMAL OVERLOAD RELAY, WITH START AND STOP/RESET BUTTONS



Electrical features

Relay adj range	A	0.6-1
IEC technical characteristics ($\leq 440V$)		
	le kW	A kW
	1	0.18...0.25

Components

Starter enclosure standard supplied	M0PA
Contactor standard supplied	BG0910A
Thermal relay standard supplied	RF91

UL technical data

Maximum UL/CSA horsepower ratings three-phase, 3-pole			
	440V-480V	HP	0.75
	550V-600V	HP	0.5
UL degree of protection			Type 1, 12K, 4, 4X

Mechanical features

Weight	g	760
--------	---	-----

Ambient conditions


Operating temperature			
	min	°C	-25
	max	°C	+60
Storage temperature			
	min	°C	-40
	max	°C	+70

Resistance & Protection


IEC degree of protection	IP65
--------------------------	------

Dimensions

DIRECT-ON-LINE-STARTER, 0.6...1A (0.18...0.25KW AT 400V), IP65, CONTACTOR COIL VOLTAGE 24VAC 50/60HZ, NON-METALLIC ENCLOSURE, WITH THERMAL OVERLOAD RELAY, WITH START AND STOP/RESET BUTTONS

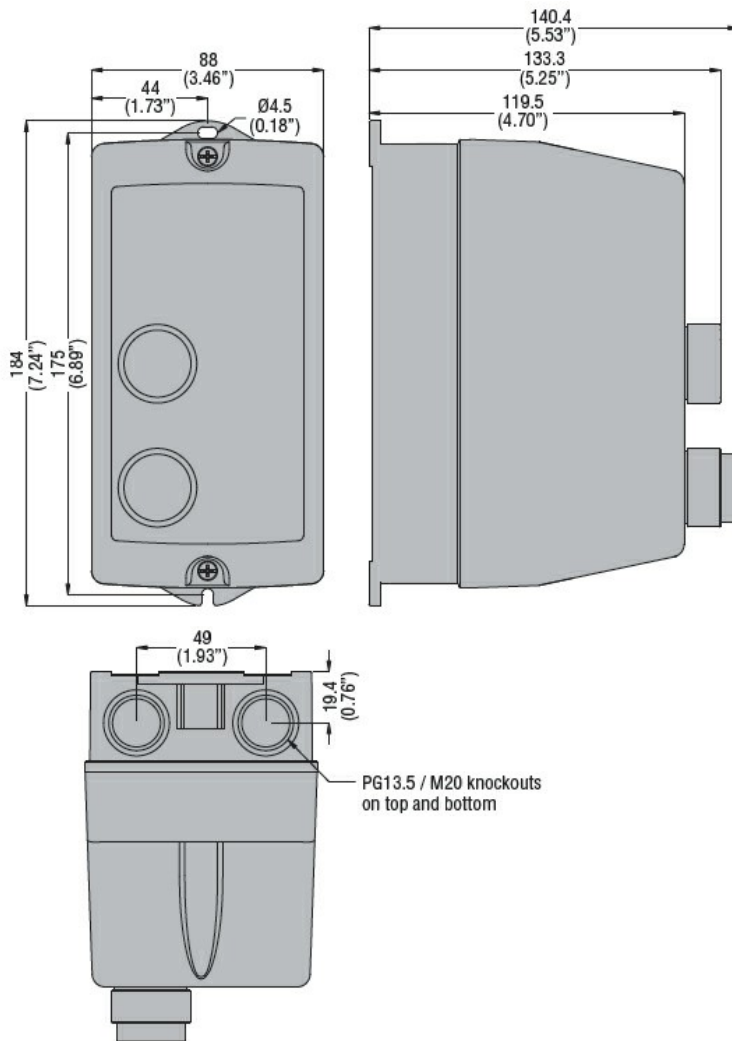

Wiring diagrams

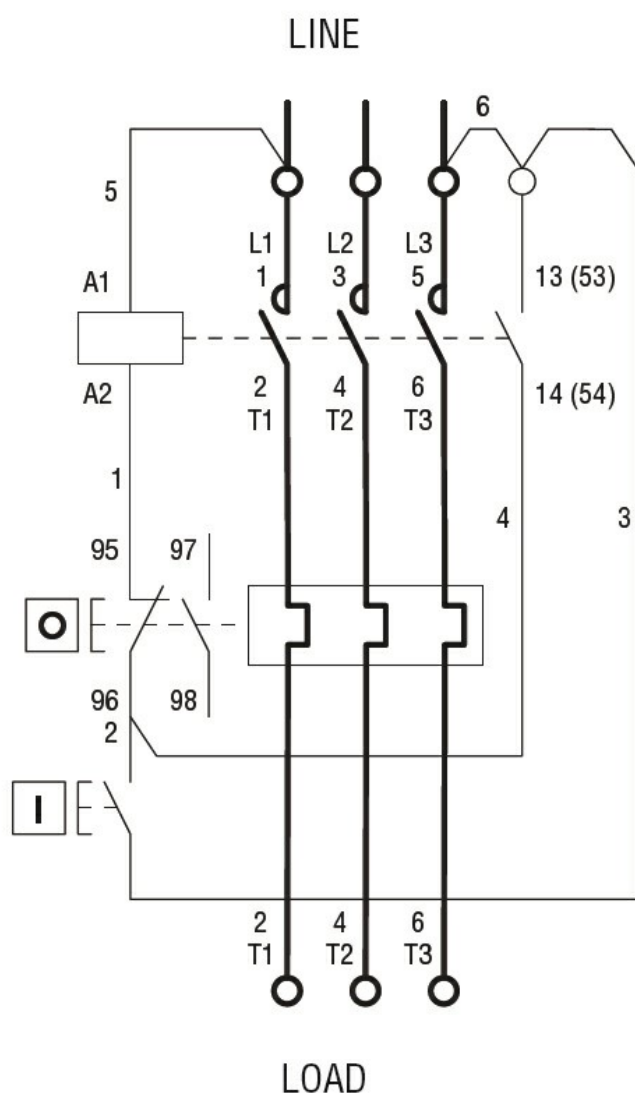

I = Start; O = Stop/Reset

Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-4-1
UL508 CSA C22.2 n° 14

Certificates

CSAus
cULus
EAC

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination