



#### Electrical features

|                                           |   |    |
|-------------------------------------------|---|----|
| Maximum operating current ( $\leq 440V$ ) | A | 10 |
|-------------------------------------------|---|----|

#### Components

|                                      |         |
|--------------------------------------|---------|
| Starter enclosure standard supplied  | M0RA    |
| Contactor standard supplied          | BG0910A |
| Thermal relay to purchase separately | RF9...  |

#### UL technical data

|                         |                    |
|-------------------------|--------------------|
| UL degree of protection | Type 1, 12K, 4, 4X |
|-------------------------|--------------------|

#### Mechanical features

|        |   |     |
|--------|---|-----|
| Weight | g | 627 |
|--------|---|-----|


#### Ambient conditions

|                       |     |    |     |
|-----------------------|-----|----|-----|
| Operating temperature | min | °C | -25 |
|                       | max | °C | +60 |
| Storage temperature   | min | °C | -40 |
|                       | max | °C | +70 |


#### Resistance & Protection

|                          |      |
|--------------------------|------|
| IEC degree of protection | IP65 |
|--------------------------|------|

#### Dimensions

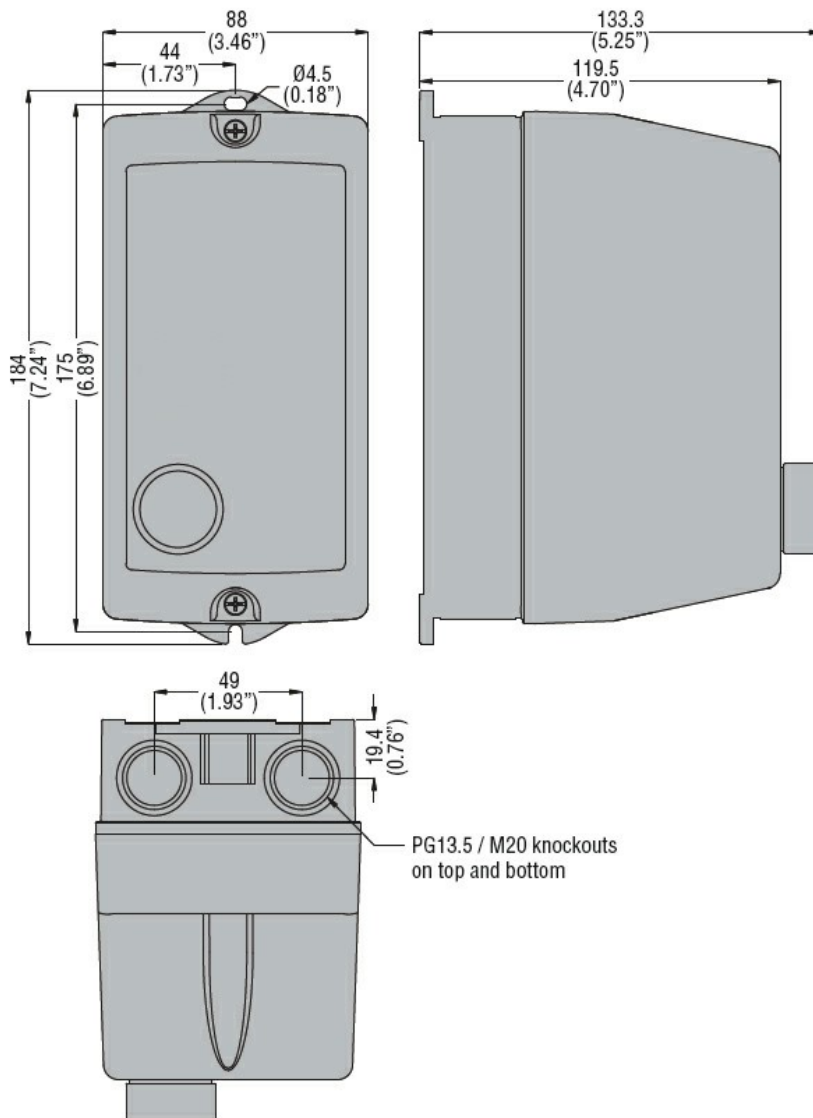

## Wiring diagrams

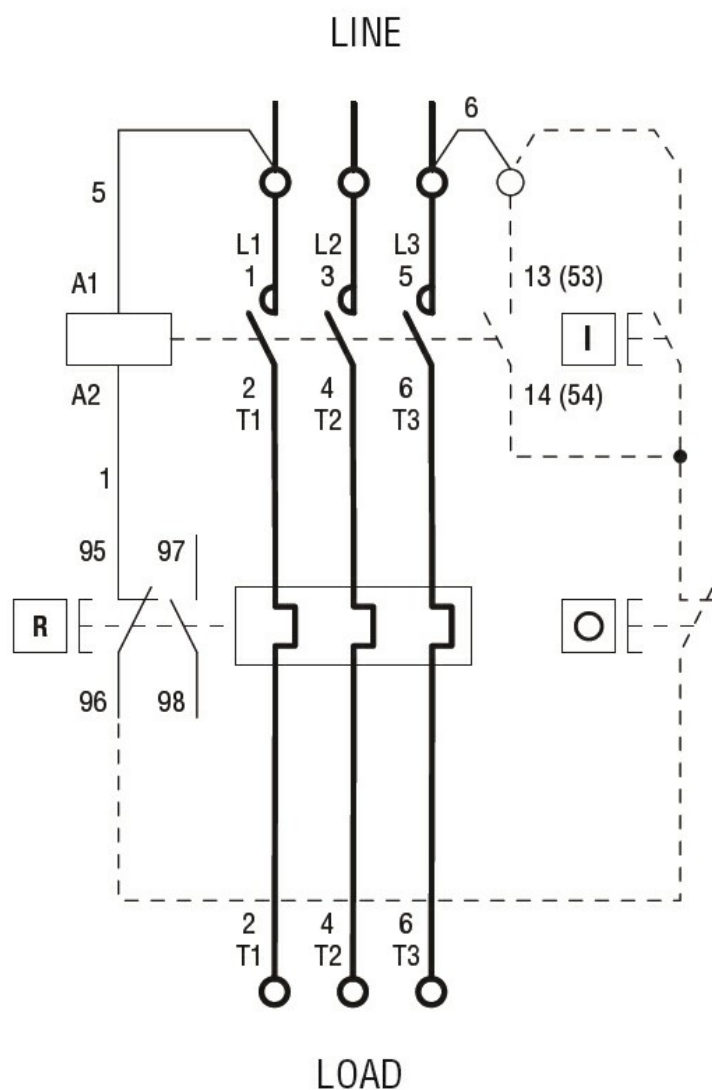

R = Reset; I = Start; O = Stop

#### Certifications and compliance

##### Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

##### Certificates

CSAus  
cULus  
EAC

#### ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination