





Electrical features			
Maximum operating current (≤440V)	A	25	
Components			
Starter enclosure standard supplied	M2RA		
Contactor standard supplied	BF2510A		
Thermal relay to purchase separately	RF38...		
UL technical data			
UL degree of protection	Type 1, 12K, 4, 4X		
Mechanical features			
Weight	g	1020	
Ambient conditions			
Operating temperature	min	°C	-25
	max	°C	+60
Storage temperature	min	°C	-40
	max	°C	+70
Resistance & Protection			
IEC degree of protection	IP65		
Dimensions			

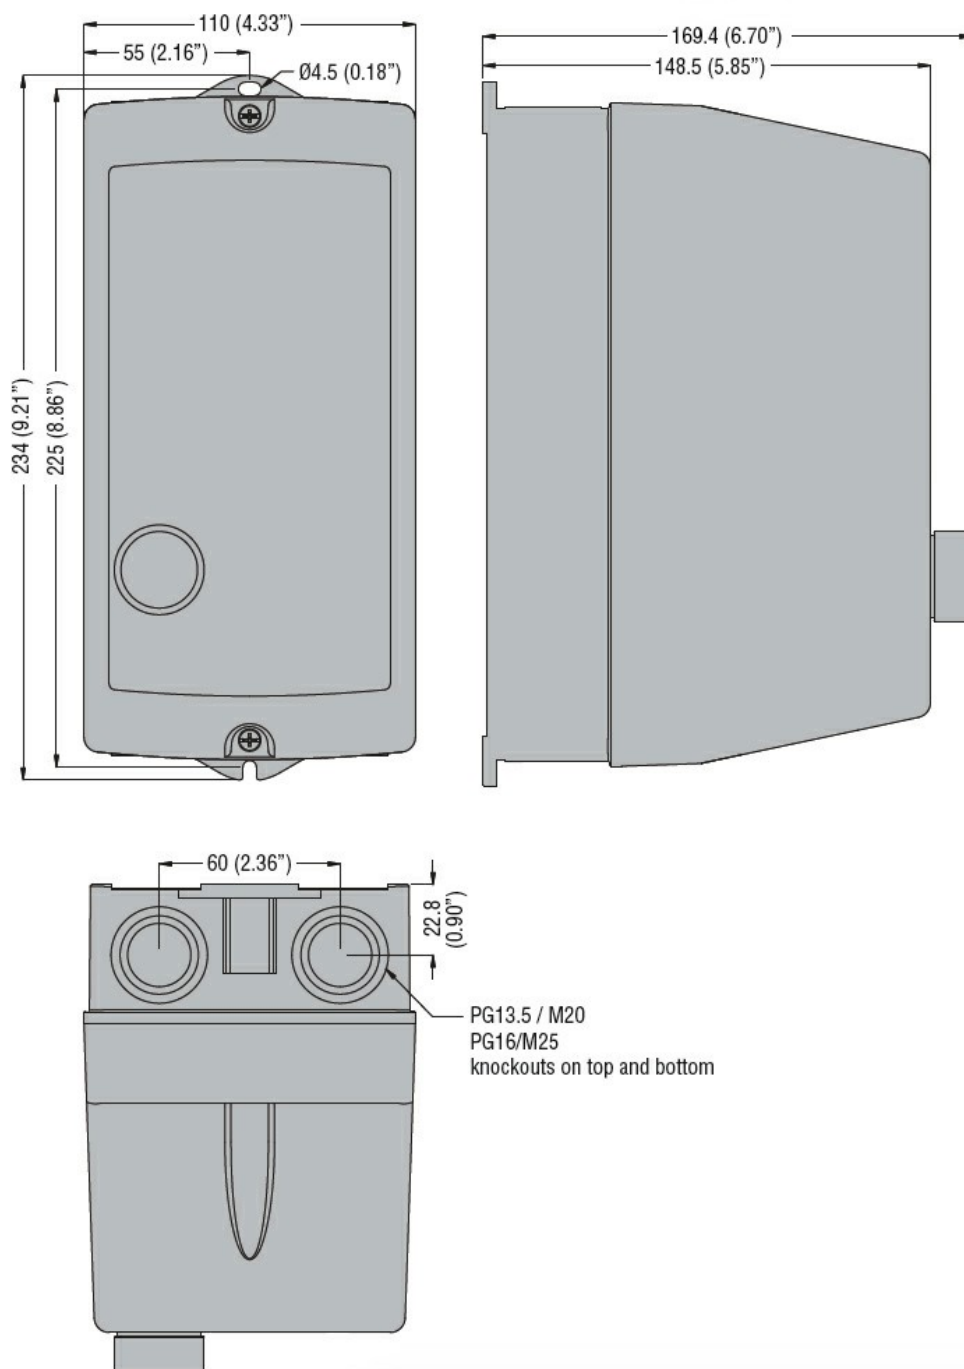

Wiring diagrams

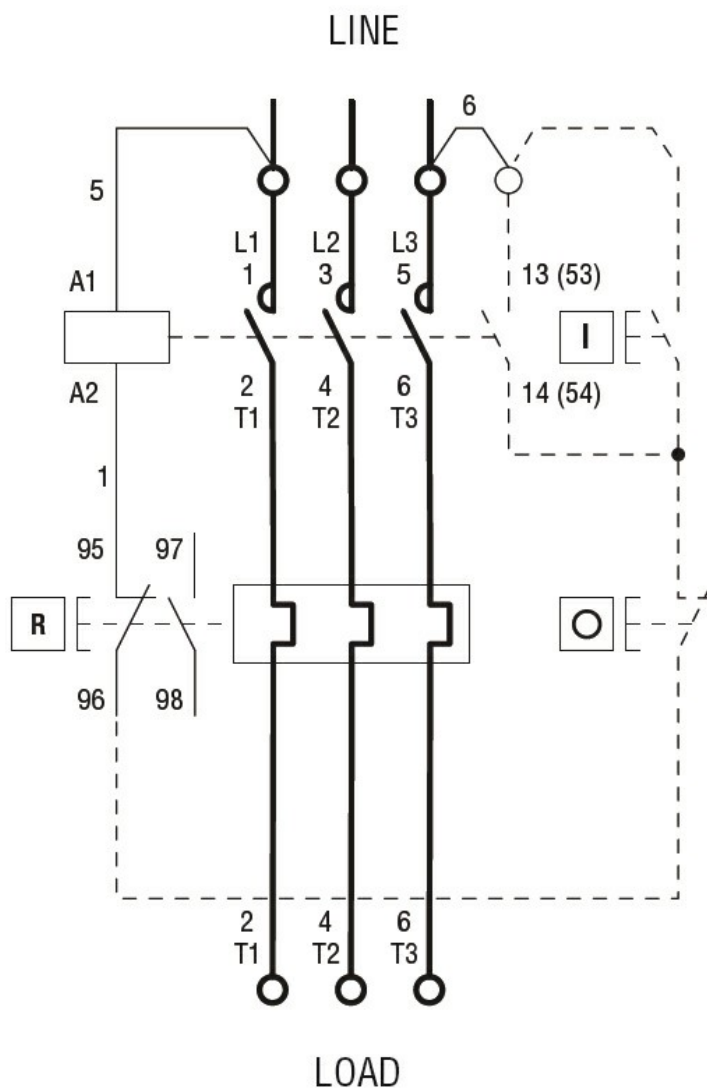

R = Reset; I = Start; O = Stop

Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-4-1
UL508 CSA C22.2 n° 14

Certificates

CSAus
cULus
EAC

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination