





| Electrical features                       |     |                    |     |
|-------------------------------------------|-----|--------------------|-----|
| Maximum operating current ( $\leq 440V$ ) | A   | 32                 |     |
| Components                                |     |                    |     |
| Starter enclosure standard supplied       |     | M2RA               |     |
| Contactor standard supplied               |     | BF3200A            |     |
| Thermal relay to purchase separately      |     | RF38...            |     |
| UL technical data                         |     |                    |     |
| UL degree of protection                   |     | Type 1, 12K, 4, 4X |     |
| Mechanical features                       |     |                    |     |
| Weight                                    | g   | 1110               |     |
| Ambient conditions                        |     |                    |     |
| Operating temperature                     | min | °C                 | -25 |
|                                           | max | °C                 | +60 |
| Storage temperature                       | min | °C                 | -40 |
|                                           | max | °C                 | +70 |
| Resistance & Protection                   |     |                    |     |
| IEC degree of protection                  |     | IP65               |     |
| Dimensions                                |     |                    |     |

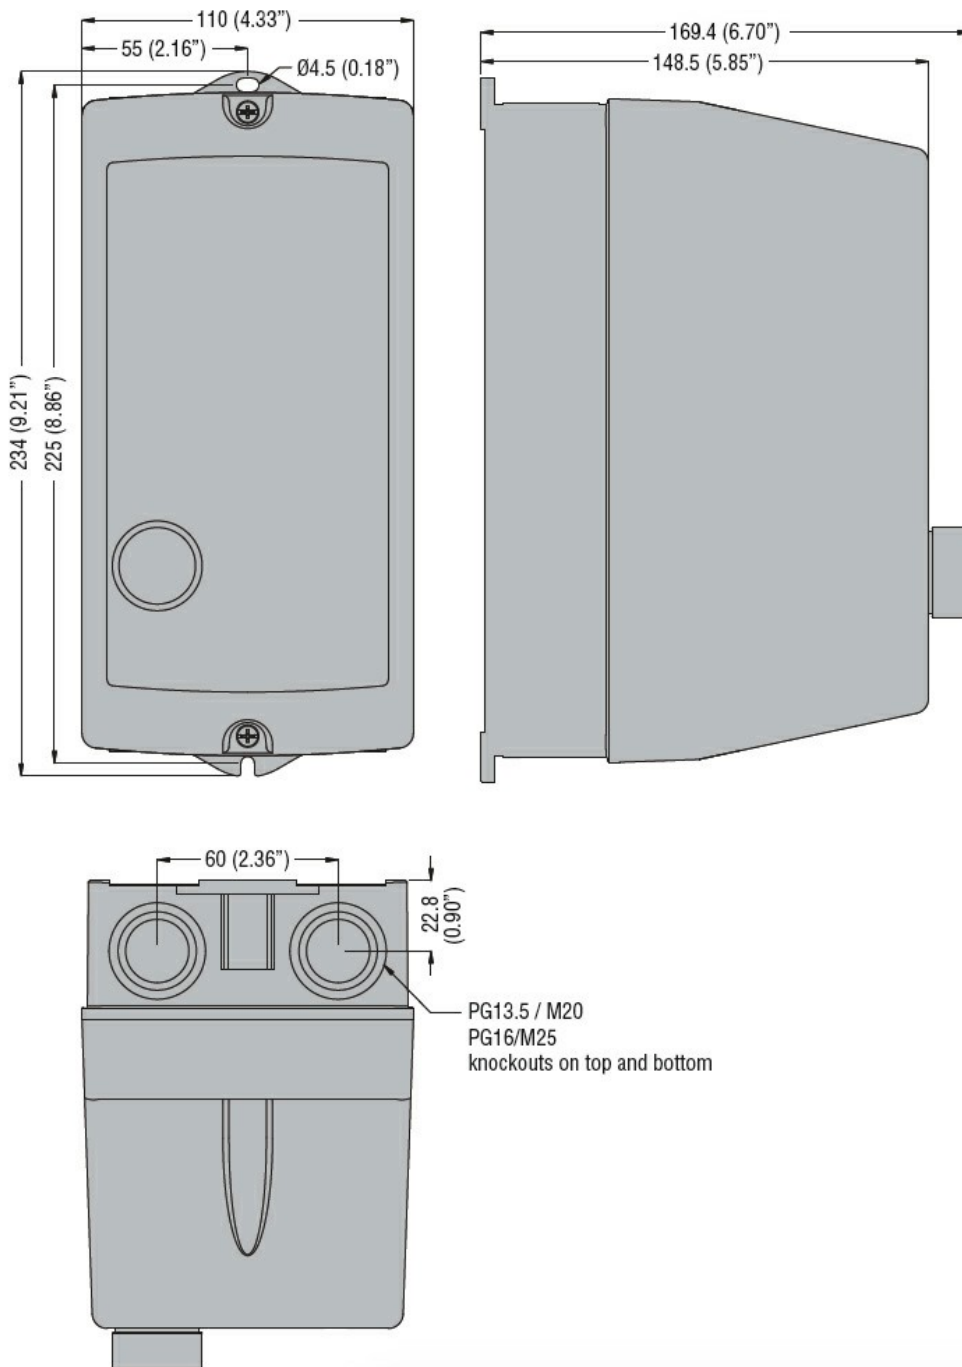

## Wiring diagrams

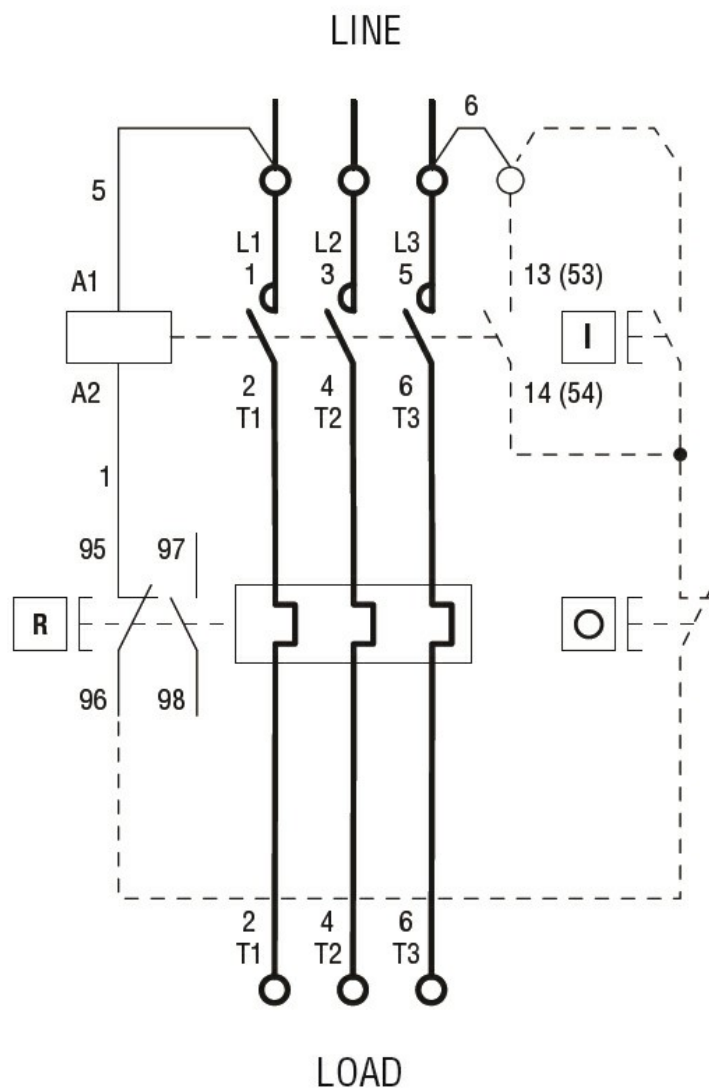

R = Reset; I = Start; O = Stop

### Certifications and compliance

#### Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

#### Certificates

CSAus  
cULus  
EAC

### ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination