





Electrical features			
Maximum operating current ($\leq 440V$)	A	32	
Components			
Starter enclosure standard supplied		M2RA	
Contactor standard supplied		BF3200A	
Thermal relay to purchase separately		RF38...	
UL technical data			
UL degree of protection		Type 1, 12K, 4, 4X	
Mechanical features			
Weight	g	1110	
Ambient conditions			
Operating temperature	min	°C	-25
	max	°C	+60
Storage temperature	min	°C	-40
	max	°C	+70
Resistance & Protection			
IEC degree of protection		IP65	
Dimensions			

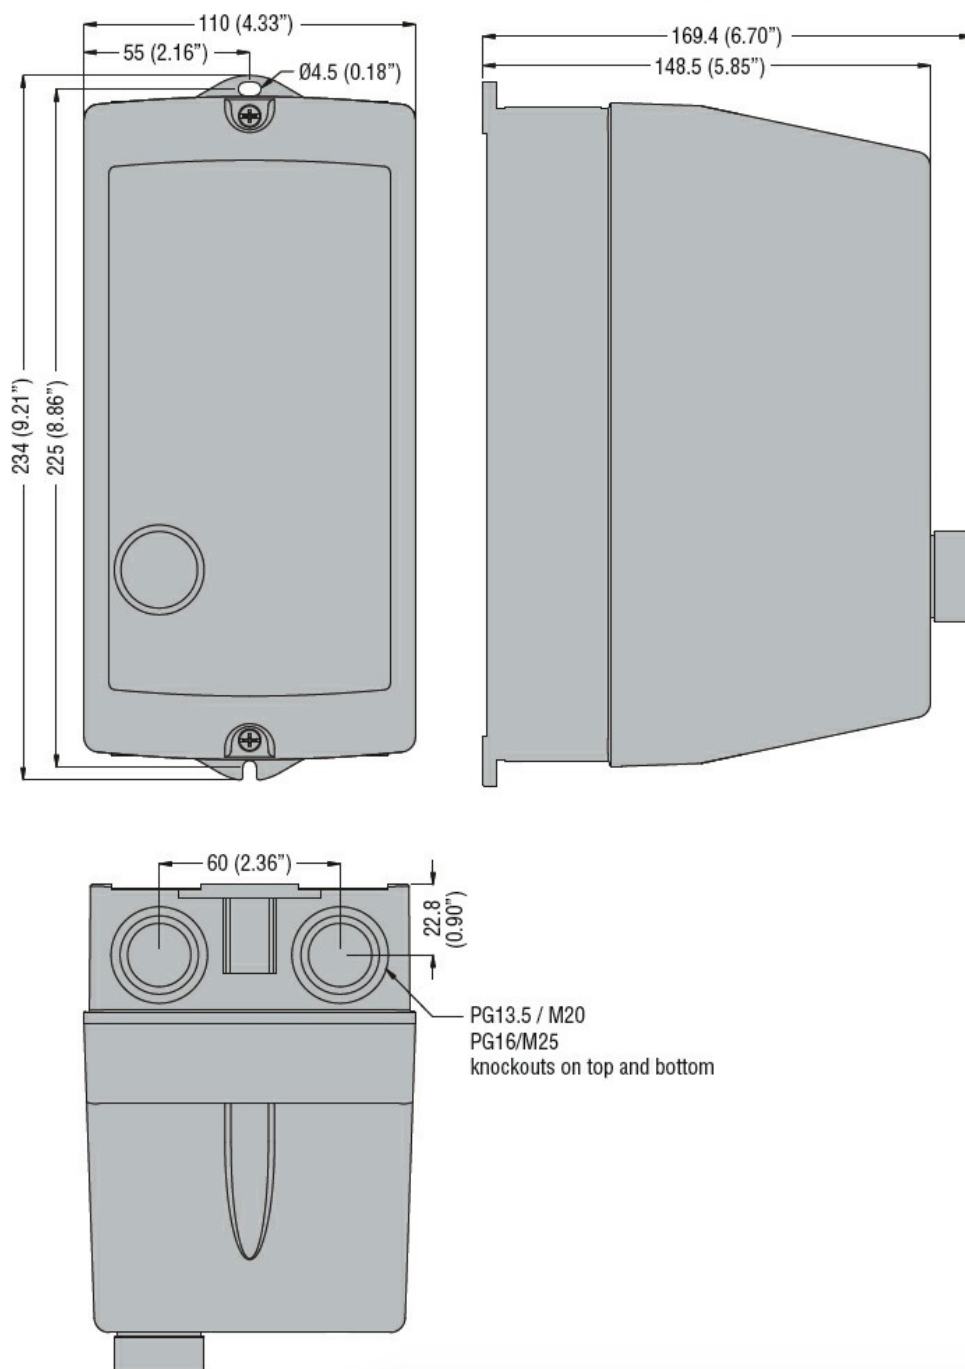

Wiring diagrams

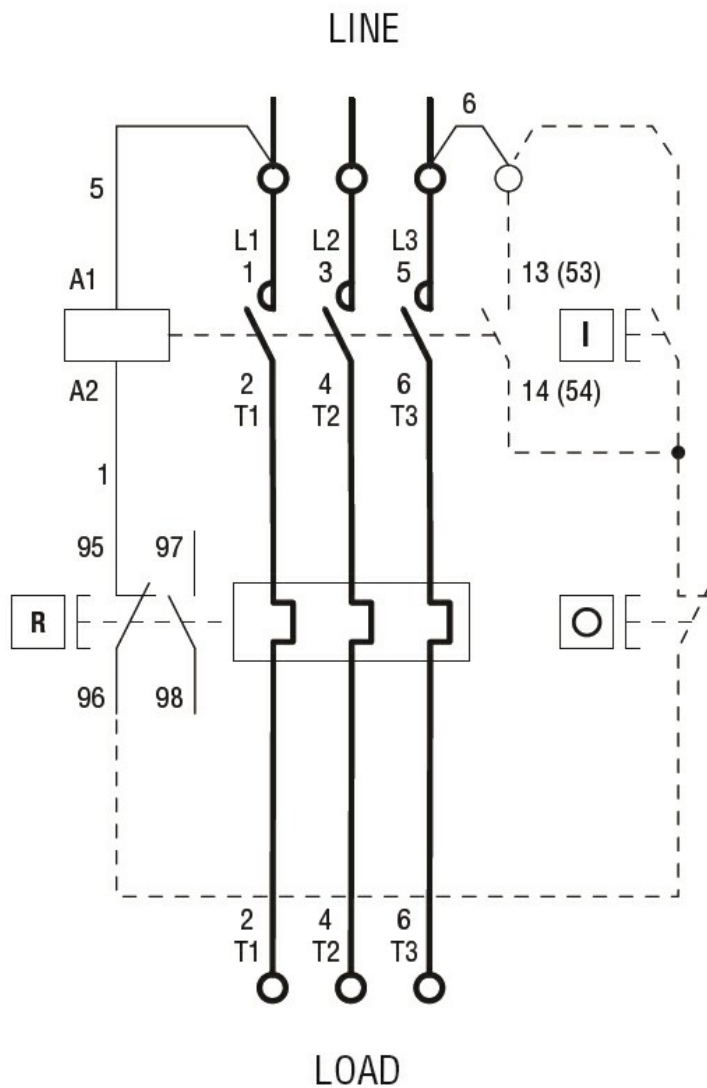

R = Reset; I = Start; O = Stop

Certifications and compliance

Compliance

IEC/EN 60947-1
IEC/EN 60947-4-1
UL508 CSA C22.2 n° 14

Certificates

CSAus
cULus
EAC

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination