



#### Electrical features

|                                               |    |       |
|-----------------------------------------------|----|-------|
| Relay adj range                               | A  | 24-32 |
| IEC technical characteristics ( $\leq 440V$ ) |    |       |
|                                               | Ie | 32    |
|                                               | kW | 15    |

#### Components

|                                     |          |
|-------------------------------------|----------|
| Starter enclosure standard supplied | M2RA     |
| Contactor standard supplied         | BF3200A  |
| Thermal relay standard supplied     | RF383200 |

#### UL technical data

|                         |                    |
|-------------------------|--------------------|
| UL degree of protection | Type 1, 12K, 4, 4X |
|-------------------------|--------------------|

#### Mechanical features

|        |   |      |
|--------|---|------|
| Weight | g | 1260 |
|--------|---|------|


#### Ambient conditions

|                       |     |    |     |
|-----------------------|-----|----|-----|
| Operating temperature | min | °C | -25 |
|                       | max | °C | +60 |
| Storage temperature   | min | °C | -40 |
|                       | max | °C | +70 |


#### Resistance & Protection

|                          |      |
|--------------------------|------|
| IEC degree of protection | IP65 |
|--------------------------|------|

#### Dimensions

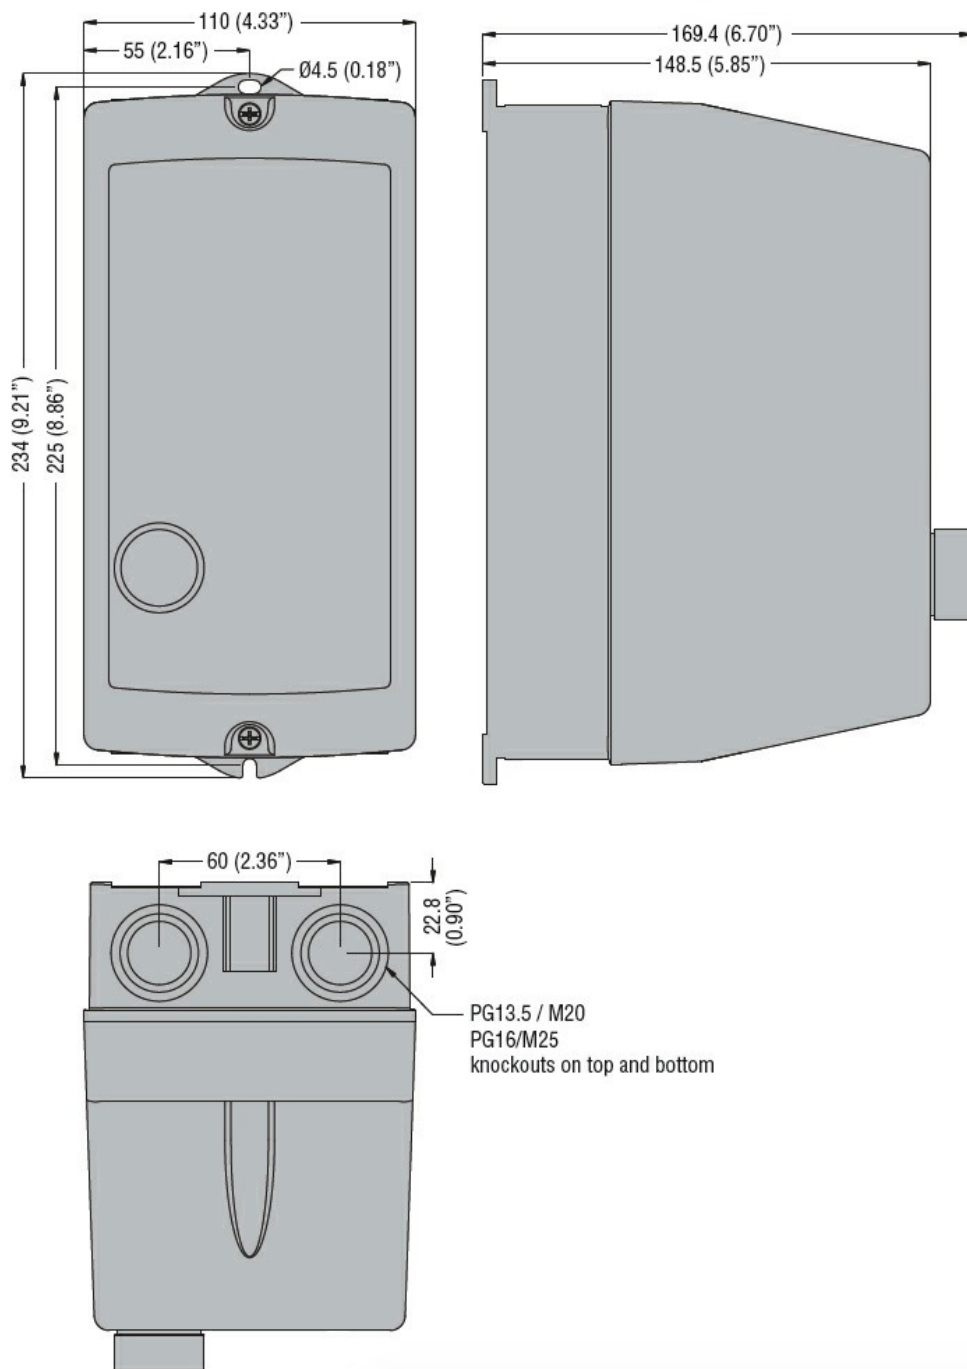

## Wiring diagrams

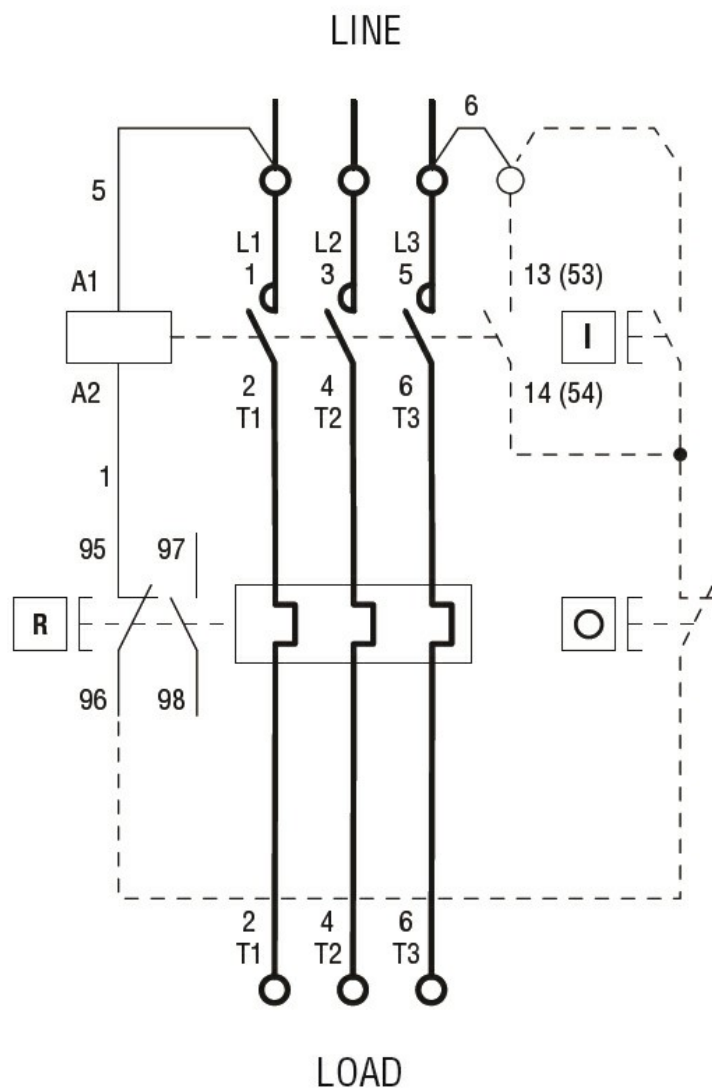

R = Reset; I = Start; O = Stop

#### Certifications and compliance

##### Compliance

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

##### Certificates

CSAus  
cULus  
EAC

#### ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination