



Electrical features

Maximum operating current (≤440V)	A	50
-----------------------------------	---	----

Components

Starter enclosure standard supplied	M3PA
Contactor standard supplied	BF5000A
Thermal relay to purchase separately	RF82...
Auxiliary contact standard supplied	G41810

Mechanical features

Weight	g	3110
--------	---	------

Ambient conditions

Operating temperature	min	°C	-25
	max	°C	+60



Storage temperature

min	°C	-40
max	°C	+70


Resistance & Protection

Frontal IP degree	IP65
-------------------	------


Dimensions

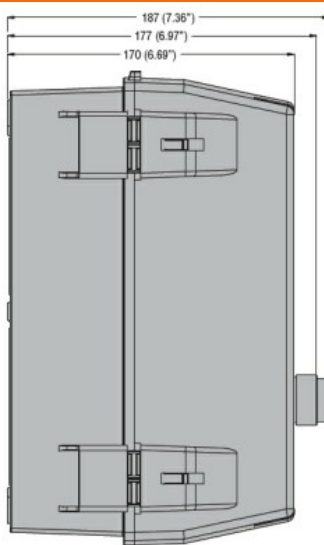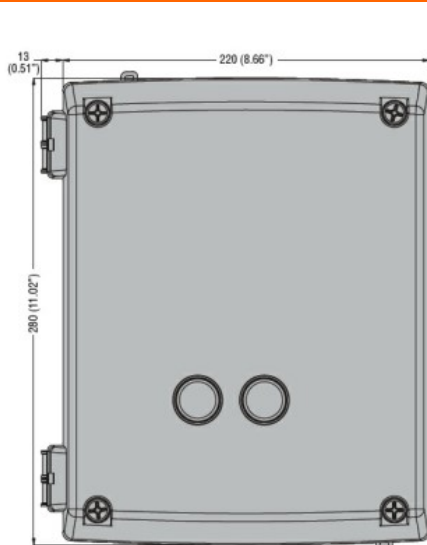

Drilling for surface fixing

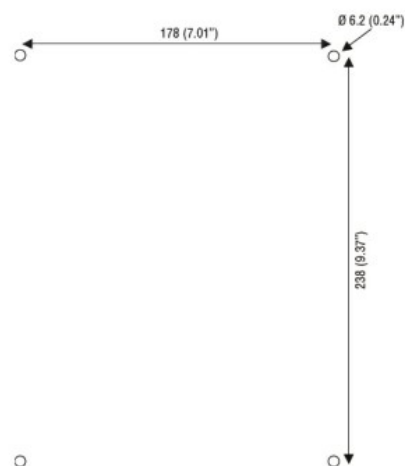

Wiring diagrams

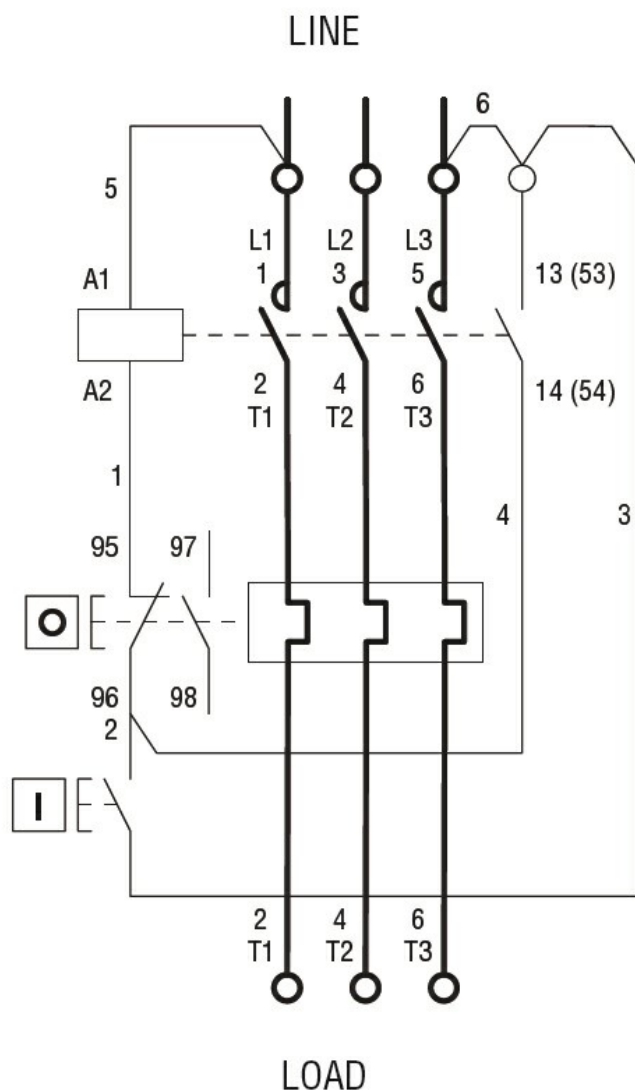

I = Start; O = Stop/Reset

Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-4-1

UL508 CSA C22.2 n° 14

Certificates

CSAus

cULus

EAC

ETIM classification

ETIM 8.0

EC001037 -
Motor
starter/Motor
starter
combination