



### Electrical features

|                                               |    |       |
|-----------------------------------------------|----|-------|
| Relay adj range                               | A  | 45-65 |
| IEC technical characteristics ( $\leq 440V$ ) |    |       |
|                                               | Ie | A     |
|                                               | kW | kW    |
|                                               | 65 | 30    |

### Components

|                                     |          |
|-------------------------------------|----------|
| Starter enclosure standard supplied | M3PA     |
| Contactor standard supplied         | BF6500A  |
| Thermal relay standard supplied     | RF826500 |

### UL technical data

Maximum UL/CSA horsepower ratings three-phase, 3-pole

|           |    |    |
|-----------|----|----|
| 200V-208V | HP | 20 |
| 220V-240V | HP | 25 |
| 440V-480V | HP | 50 |
| 550V-600V | HP | 60 |

### Mechanical features

|        |   |      |
|--------|---|------|
| Weight | g | 3760 |
|--------|---|------|

### Ambient conditions

|                       |    |     |  |
|-----------------------|----|-----|--|
| Operating temperature |    |     |  |
| min                   | °C | -25 |  |
| max                   | °C | +60 |  |


Storage temperature

|     |    |     |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +70 |


### Resistance & Protection

|                   |      |
|-------------------|------|
| Frontal IP degree | IP65 |
|-------------------|------|

### Dimensions

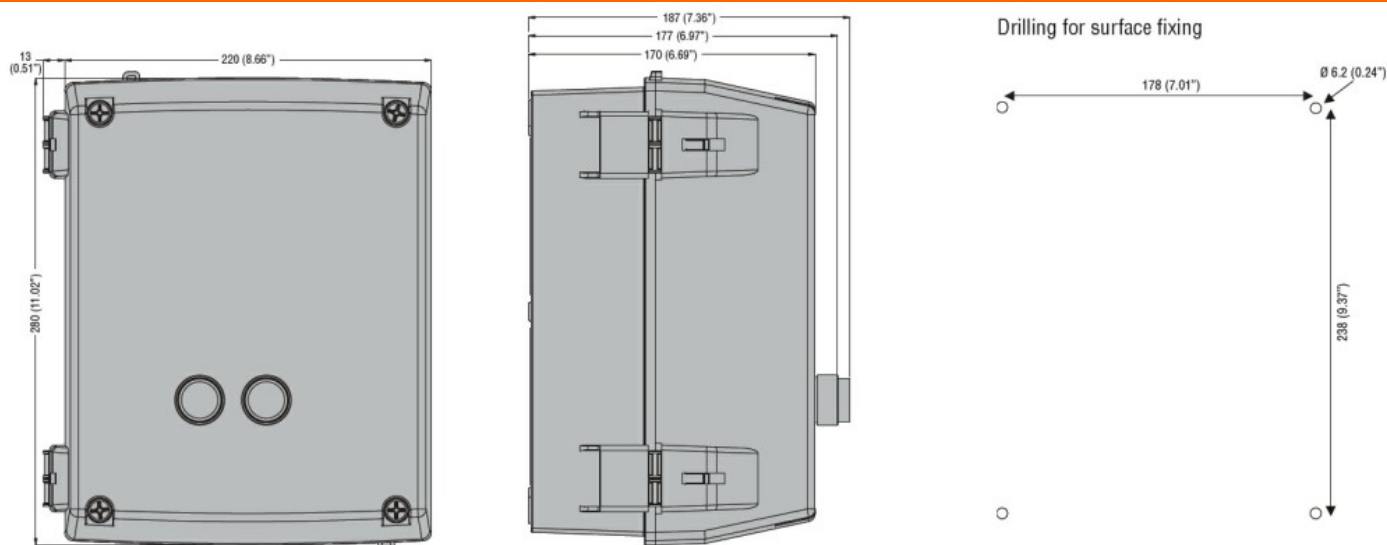

### Wiring diagrams

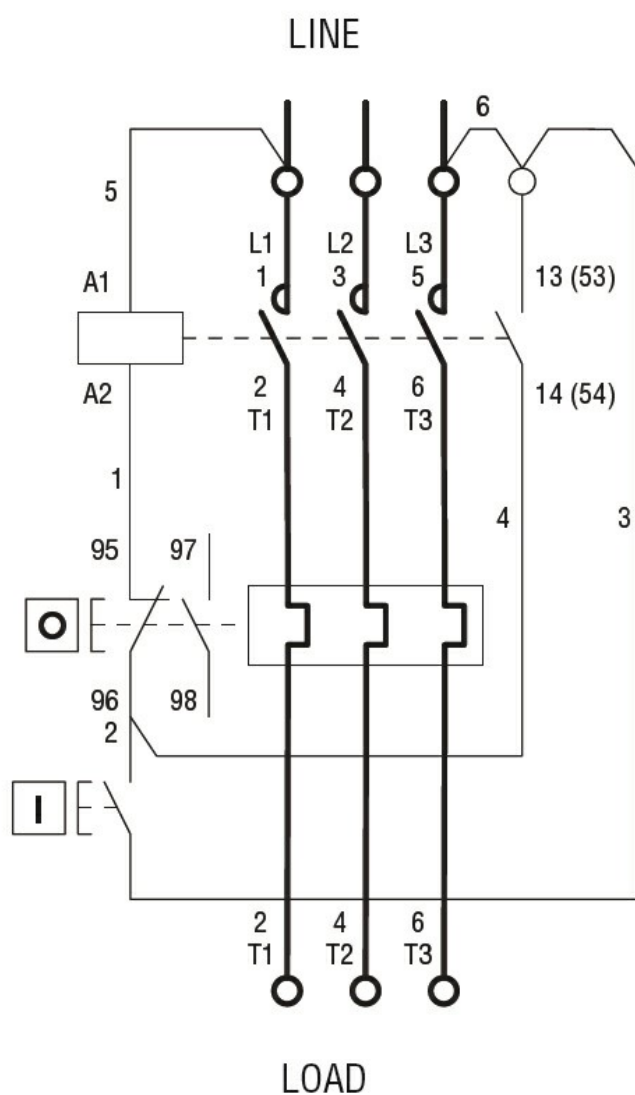

I = Start; O = Stop/Reset

## Certifications and compliance

## Certificates

EAC

## ETIM classification

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination