



Electrical features

Maximum operating current ($\leq 440V$)	A	80
---	---	----

Components

Contactor standard supplied	BF40A, BF50A, BF65A, BF80A, BF94A	
Thermal relay to purchase separately	RF82	

Mechanical features

Weight	g	1900
--------	---	------




Ambient conditions

Operating temperature	min	°C	-25
	max	°C	+60
Storage temperature	min	°C	-40
	max	°C	+70


Resistance & Protection

Frontal IP degree	IP65
-------------------	------

Dimensions

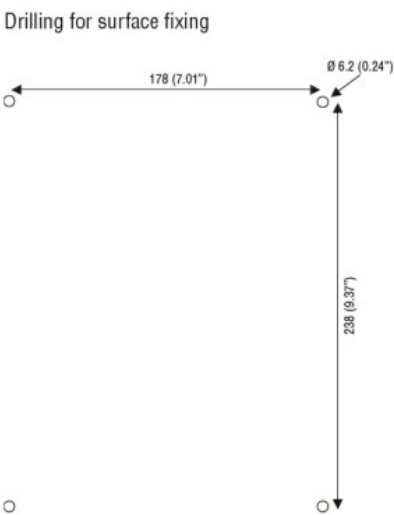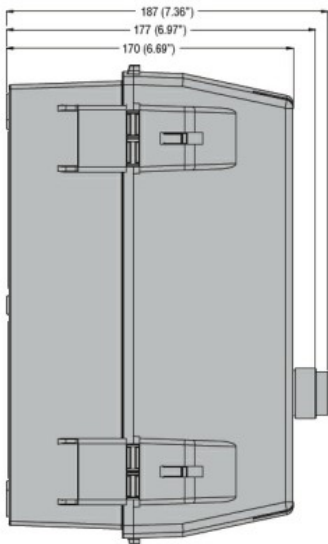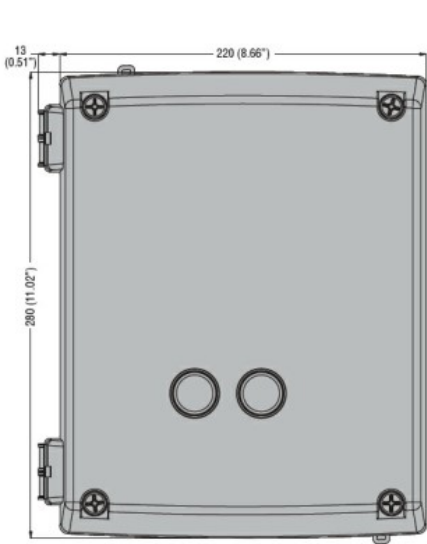

Wiring diagrams

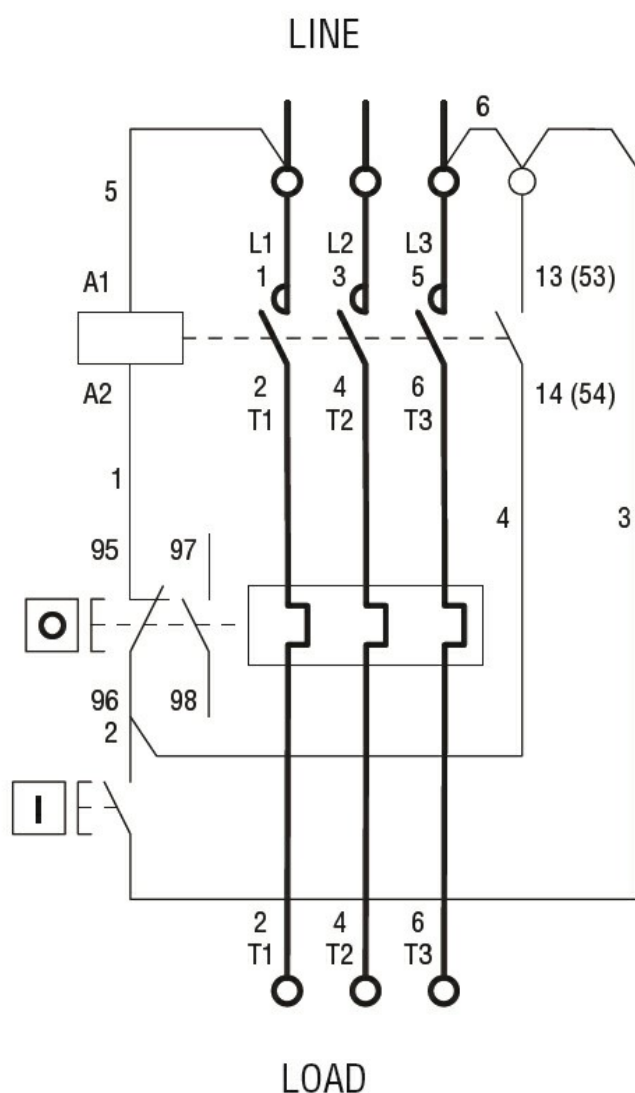

I = Start; O = Stop/Reset

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-4-1
UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC000200 -
Enclosure for
control circuit
devices