



Electrical features

Rated insulation voltage U_i IEC/EN	V	400
Rated impulse withstand voltage U_{imp}	kV	4
Rated operational voltage AC (IEC)	VAC	230
Rated frequency	Hz	50/60
Rated current (I_n)	A	25
Tripping curve		B
Residual operation characteristic		A
Rated residual current	mA	300
Short circuit rating (IEC)	kA	10
Electrical life	cycles	10000


Ambient conditions

Operating temperature	min	°C	-25
	max	°C	+60
Storage temperature	min	°C	-40
	max	°C	+80
Max altitude		m	2000

Mechanical features

Operating position				
		normal	Vertical plan	
Fixing		35mm DIN rail		
Tightening torque for terminals		max	Nm	2
		max	lbin	15
Terminals tool		Pz 2		
Conductor section				
IEC		min	mm²	1
		max	mm²	16
AWG/Kcmil		min		16
		max	kcmil	3
Mechanical life		cycles	20000	
Weight		g	205	
Frontal IP degree		IP20		
Pollution deegree		2		

Dimensions

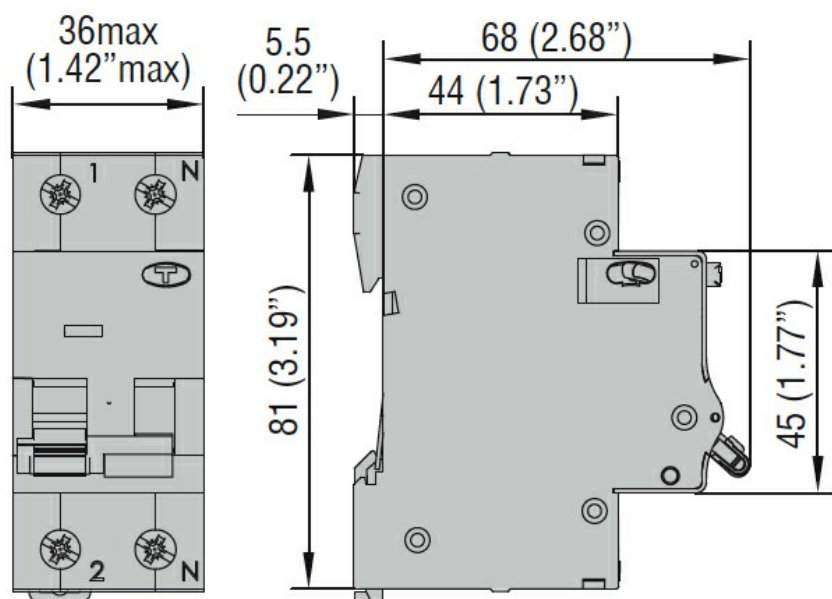

Certifications and compliance

Compliance

IEC/EN/BS 61009-1
IEC/EN/BS 61009-2-1

Certifications

CCC
EAC
TÜV-Rheinland

ETIM classification

ETIM 8.0

EC000905 -
Earth leakage
circuit breaker