





Electrical features			
Rated impulse withstand voltage Uimp	kV	4	
Rated operational voltage AC (IEC)	VAC	400	
Rated current (In)	A	6	
Conductivity	24V 10mA		
Ambient conditions			
Operating temperature	min	°C	-40
	max	°C	+70
Storage temperature	min	°C	-40
	max	°C	+80
Mechanical features			
Operating position	normal allowable	Vertical plan Any	
Tightening torque for terminals	min	Nm	1
	max	Nm	1
	min	Ibin	0.7
	max	Ibin	0.7
Terminals tool	PH2		
Conductor section	IEC		
	max	mm²	1x 2.5 - 2x 1.5
Weight		g	40
Dimensions			

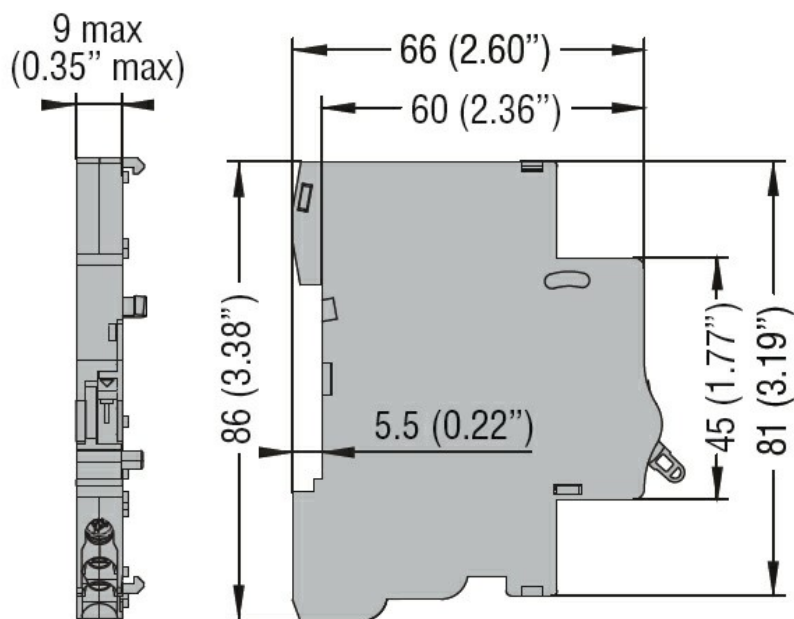

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60947-5-1. UR "UL Recognized" per Canada e USA.

Certifications

cULus
EAC

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block