



#### Operational characteristics

|                           |          |           |
|---------------------------|----------|-----------|
| Rated operational voltage | V        | 110VAC/DC |
| Rated current (In)        | A        | ≤0.5A     |
| Mechanical operation      | cycles/h | 120       |
| Average closing time      | ms       | 350       |
| Average opening time      | ms       | 230       |
| Power consumption         | W        | 14        |


#### Mechanical features


|        |   |      |
|--------|---|------|
| Weight | g | 1300 |
|--------|---|------|

#### Operations

|                 |        |       |
|-----------------|--------|-------|
| Mechanical life | cycles | 25000 |
|-----------------|--------|-------|

#### Dimensions

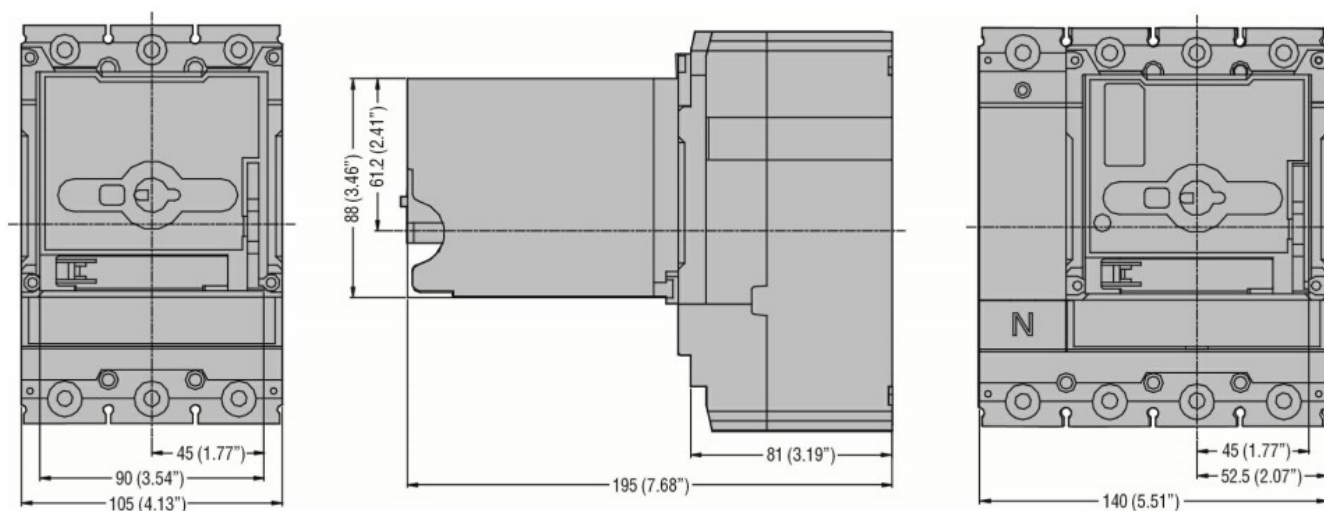

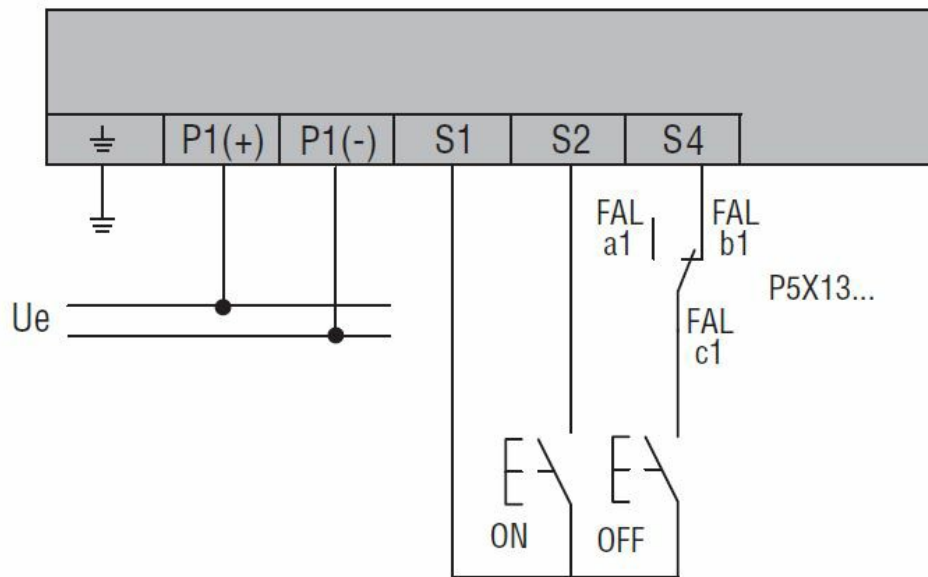

**Note:** Connect an NC contact of an alarm switch contact block in series with S4 to prevent remote closing of the MCCB after tripping due to overcurrent or short circuit.

Wiring diagrams

Certifications and compliance

Certificates

cULus

ETIM classification

EC000066 - Power contactor, AC switching