



General characteristics

Description	Minimum and maximum AC voltage relay		
Type of system	Single-phase		
Power supply			
Auxiliary supply voltage U_s	Self powered		
Operating voltage range	0.7...1.2 U_e		
Rated frequency	Hz	50/60 $\pm 5\%$	
Power consumption Max	VA	10	
Power dissipation Max	W	1.5	
Control circuit			
Rated voltage to control (U_e)	min	VAC	208
	Max	VAC	240
Voltage set-point ($\%U_e$)	min	%	80...95
	Max	%	105...115
Tripping delay	s	0.1...20	
Resetting time	s	0.1...20 (0.5 at power up)	
Resetting hysteresis	%	3	
Instantaneous tripping for U_e	Voltage $< 70\% U_e$		
Type of reset	Automatic		
Repeat accuracy	%	$\leq \pm 0.1$	
Relay outputs			
Number of relays	Nr.	1	
Relay state	Normally energised De-energises at tripping		
Contact arrangement	1 changeover SPDT		
Rated operational voltage AC (IEC)	VAC	250	
Maximum switching voltage	VAC	400	
IEC Conventional free air thermal current $I_{th} \leq 40^{\circ}C$	A	8	
UL/CSA and IEC/EN 60947-5-1 designation	B300		
Electrical life (with rated load)	cycles	100000	
Mechanical life	cycles	30000000	
Functions			
Modular version	2U		
Minimum AC voltage	Yes		
Maximum AC voltage	Yes		
Minimum frequency	No		
Maximum frequency	No		
Indications			

Indication	1 green LED for power on and tripping and 2 red LEDs for tripping
------------	---

Connections

Terminals type			Screw
Tightening torque for terminals			
	max	Nm	0.8
	max	lbin	7
Conductor cross section			
AWG/Kcmil			
	min	AWG	24
	Max	AWG	12
IEC			
	min	mm²	0.2
	Max	mm²	4

Insulations

Rated insulation voltage Ui	V	440
Rated impulse withstand voltage Uimp	kV	6
Operating frequency withstand voltage	kV	4


Ambient conditions

Temperature			
Operating temperature	min max	°C °C	-20 +60
Storage temperature	min max	°C °C	-30 +80


Housing

Execution (n° of modules)	2	
Material	Self-extinguishing polyamide	
Mounting	35mm DIN rail (IEC/EN 60715)	
IEC degree of protection	IP40 on front; IP20 at terminals	
Dimensions (W x H x D)	mm	35.8 x 104.7 x 64.9
Weight	g	125

Dimensions

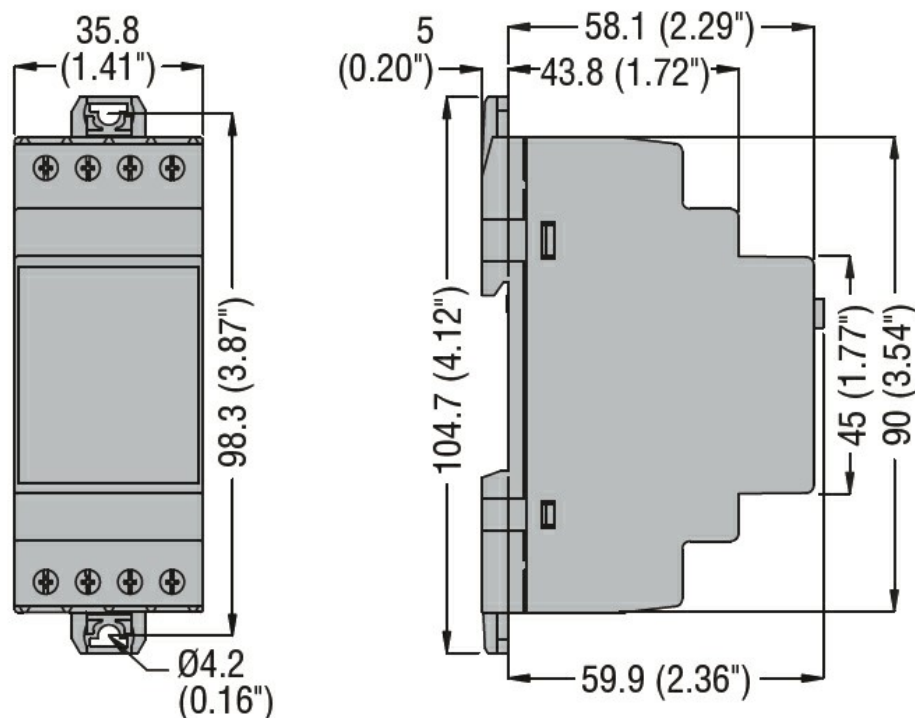

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60255-5

IEC/EN 60335-2-89

IEC/EN 61000-6-2

IEC/EN 61000-6-3

UL 508

Certificates

CSA C22.2 n. 60335-2-40:22 LZGH A2L

CSA C22.2 No. 60335-2-89:21 LZGH A2L

cULus

EAC

UL 60335-2-40 LZGH A2L

UL 60335-2-89 LZGH A2L

ETIM classification

ETIM 8.0

EC001438 -
Voltage
monitoring relay