



General characteristics

Description	Minimum and maximum AC voltage, phase loss,neutral loss, incorrect phase sequence and asymmetry relay		
Type of system	Three-phase with/without neutral		
Power supply			
Auxiliary supply voltage Us	Self powered		
Operating voltage range	0.7...1.2 Ue		
Rated frequency	Hz	50/60 ±5%	
Power consumption Max	VA	27	
Power dissipation Max	W	1.9	
Control circuit			
Rated voltage to control (Ue)	min	VAC	208
	Max	VAC	240
Voltage set-point (%Ue)	min	%	80...95
	Max	%	105...115
Asymmetry set-point (%Ue)		%	5...15
Tripping delay		s	0.1...20
Resetting time		s	0.5
Resetting hysteresis		%	3
Instantaneous tripping for Ue	Voltage <70% Ue		
Type of reset	Automatic		
Repeat accuracy		%	<±0.1
Tripping time for phase loss		ms	60
Relay outputs			
Number of relays	Nr.	2	
Relay state	Normally energised De-energises at tripping		
Contact arrangement	2 changeover SPDT		
Rated operational voltage AC (IEC)	VAC	250	
Maximum switching voltage	VAC	400	
IEC Conventional free air thermal current Ith ≤ 40°C	A	8	
UL/CSA and IEC/EN 60947-5-1 designation	B300		
Electrical life (with rated load)	cycles	100000	
Mechanical life	cycles	30000000	

Functions

Modular version	3U
Minimum AC voltage	Yes
Maximum AC voltage	Yes
Natural loss	Yes
Phase loss	Yes
Incorrect phase sequence	Yes
Asymmetry	Yes
Minimum frequency	No
Maximum frequency	No
Programmable via NFC technology and APP	No

Indications

Indication	1 green LED for power on and tripping and 3 red LEDs for tripping
------------	---

Connections

Terminals type			Screw		
Tightening torque for terminals			max	Nm	0.8
			max	lbin	7
Conductor cross section					
AWG/Kcmil			min	AWG	24
			Max	AWG	12
IEC			min	mm²	0.2
			Max	mm²	4

Insulations

Rated insulation voltage Ui	V	600
Rated impulse withstand voltage Uimp	kV	6
Operating frequency withstand voltage	kV	4


Ambient conditions

Temperature	Operating temperature	min max	°C °C	-20 +60
	Storage temperature	min max	°C °C	-30 +80


Housing

Execution (n° of modules)	3	
Material	Self-extinguishing polyamide	
Mounting	35mm DIN rail (IEC/EN 60715)	
IEC degree of protection	IP40 on front; IP20 at terminals	
Dimensions (W x H x D)	mm	35.8 x 104.7 x 64.9
Weight	g	200

Dimensions

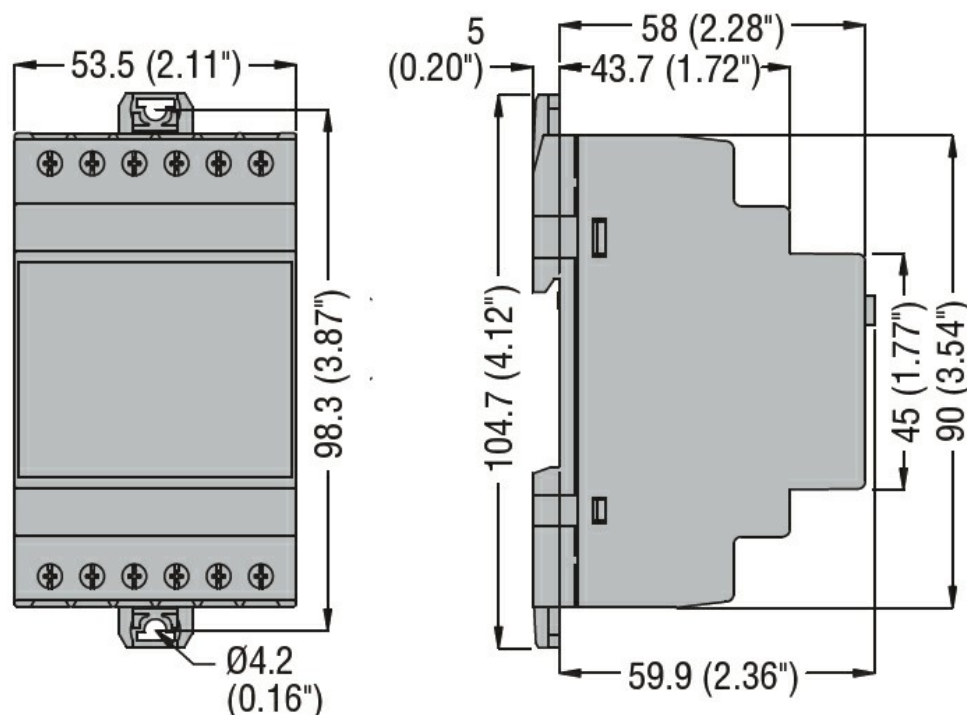

Wiring diagrams

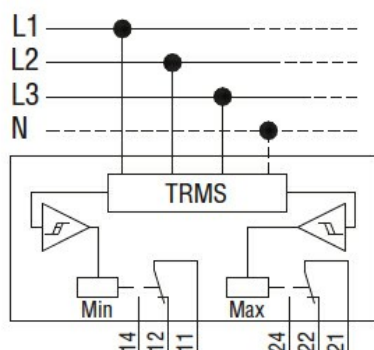

Certifications and compliance

Compliance

IEC/EN 60255-5

IEC/EN 60335-2-89

IEC/EN 61000-6-2

IEC/EN 61000-6-3

Certificates

EAC

ETIM classification

ETIM 8.0

EC001438 -
Voltage
monitoring relay