



Power supply

Rated battery voltage	V	100/240VAC - 12/24VDC
-----------------------	---	--------------------------

Static Outputs

Static output type	(SSR)
--------------------	-------

Interface

CANbus	Yes
--------	-----

Mechanical features

Conductor cross section

min	mm ²	0.2
Max	mm ²	2.5
min	AWG	24 or 18 UL/CSA
Max	AWG	12


Tightening torque (Max)

Nm	0.56
lbin	4.5


Ambient conditions

Protection degree	IP54
-------------------	------

Dimensions

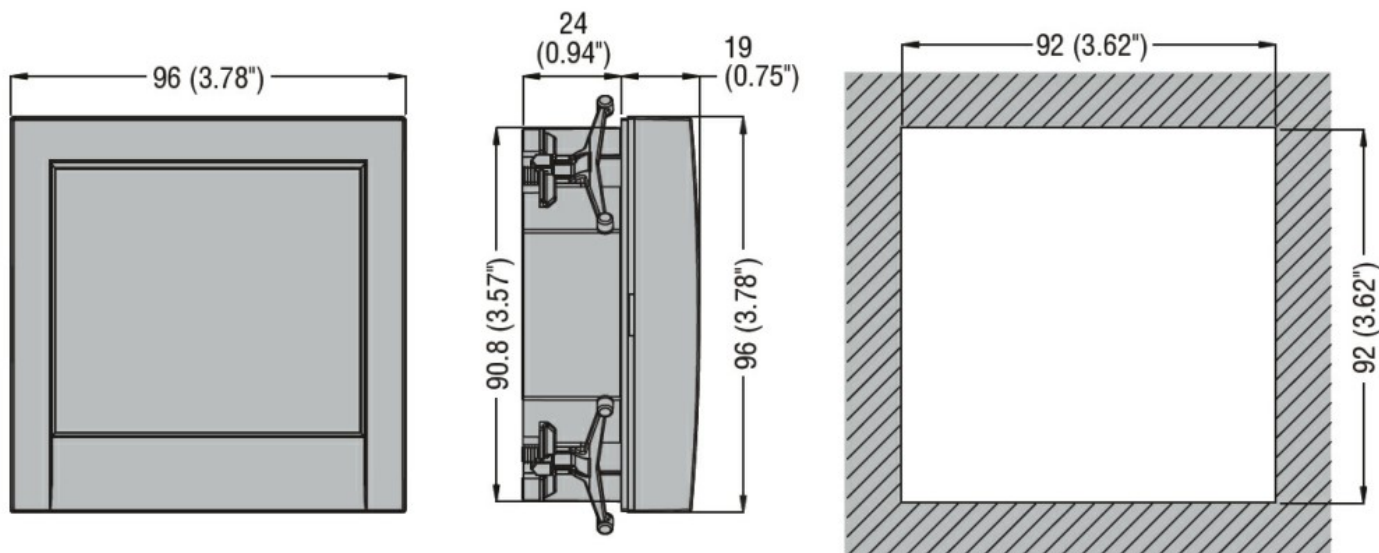

Wiring diagrams

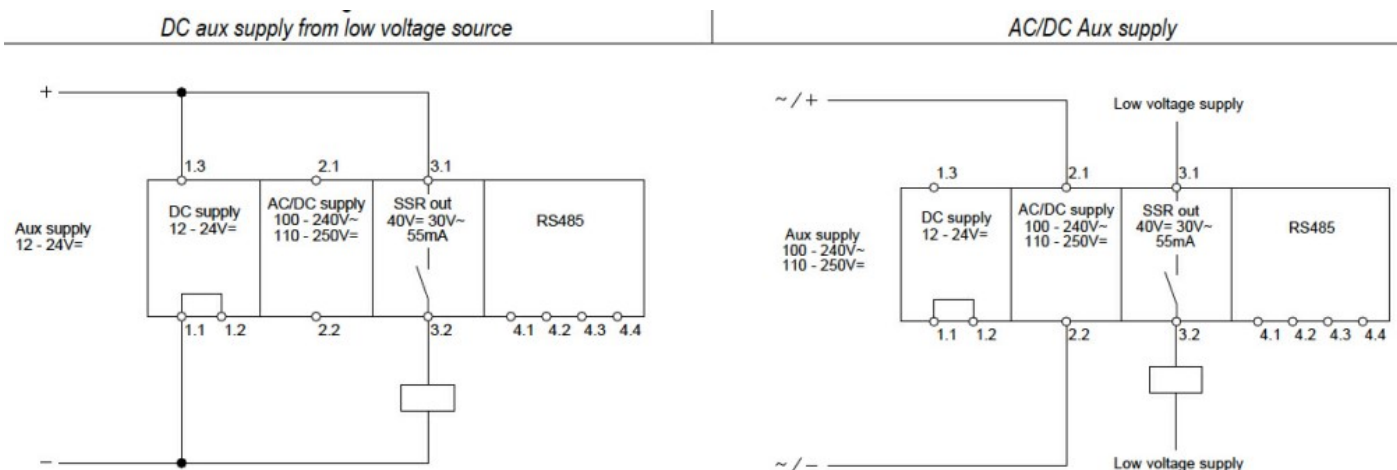

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC 61000-6-3

IEC/EN 61000-6-2

IEC/EN 61010-1

UL508

Certificates

EAC

UL Listed for USA and Canada (cULus-File E93601)

ETIM classification

ETIM 8.0

EC001427 -
Mobile panel