



Electrical features

Number of poles	Nr.	3
Magnetic protection		yes
Thermal protection		yes
Phase failure detection		yes
Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	6
Rated frequency	Hz	50/60
Thermal trip adjustment range		9...14
Rated current (I_n)	A	14
Magnetic tripping		13 x I_n
Power dissipation per pole		

min	W	1.13
max	W	2.73

Operational short-circuit current breaking capacity (I_{cs}) at AC

230V	kA	100
400V	kA	12.5
440V	kA	5
500V	kA	5
690V	kA	3

Maximum short-circuit current breaking capacity (I_{cu}) at AC

230V	kA	100
400V	kA	25
440V	kA	10
500V	kA	10
690V	kA	3

Breaking capacity short-circuit current (I_{cn}) at DC

150V	kA	0
300V	kA	0
450V	kA	0

Tripping class		10A
----------------	--	-----

IEC Utilization category		A
--------------------------	--	---

Operations

Mechanical life	cycles	100000
Electrical life	cycles	100000

Mechanical features

Tightening torque for terminals

min	Nm	2.5
max	Nm	3
min	lbin	22
max	lbin	26.5

Max number of wires simultaneously connectable	Nr.	2
--	-----	---


Conductor section

AWG/Kcmil


min	16
-----	----

	max		8
Flexible w/o lug conductor section	min	mm ²	1
	max	mm ²	10
Flexible c/w lug conductor section	min	mm ²	1
	max	mm ²	10
Flexible with insulated spade lug conductor section	min	mm ²	1
	max	mm ²	10
Screwdriver			PH2
Power terminal protection according to IEC/EN 60529			IP20 on front
Cable stripping length	main circuit	mm	10
Ambient conditions			
Temperature			
Operating temperature	min	°C	-20
	max	°C	+60
Storage temperature	min	°C	-50
	max	°C	+80
Compensation temperature	min	°C	-20
	max	°C	+50
Max altitude		m	3000
Operating position	normal allowable		Vertical plan Any
Fixing			Screw / DIN rail 35mm
Weight		g	350
UL technical data			
Motor Disconnect	at 240V	kA	30
	at 480V	kA	30
	at 600V	kA	30
	protection		100A class J
Group Motor Installation	at 240V	kA	30
	at 480V	kA	30
	at 600V	kA	30
	protection		100A class J
Tap Conductor Protection	at 480Y/277V	kA	50
	at 600Y/347V	kA	50
Maximum UL/CSA horsepower ratings single-phase	110V-120V	HP	3/4
	220V-240V	HP	2
Maximum UL/CSA horsepower ratings three-phase, 3-pole	200V-208V	HP	3
	220V-240V	HP	3
	440V-480V	HP	10

Dimensions

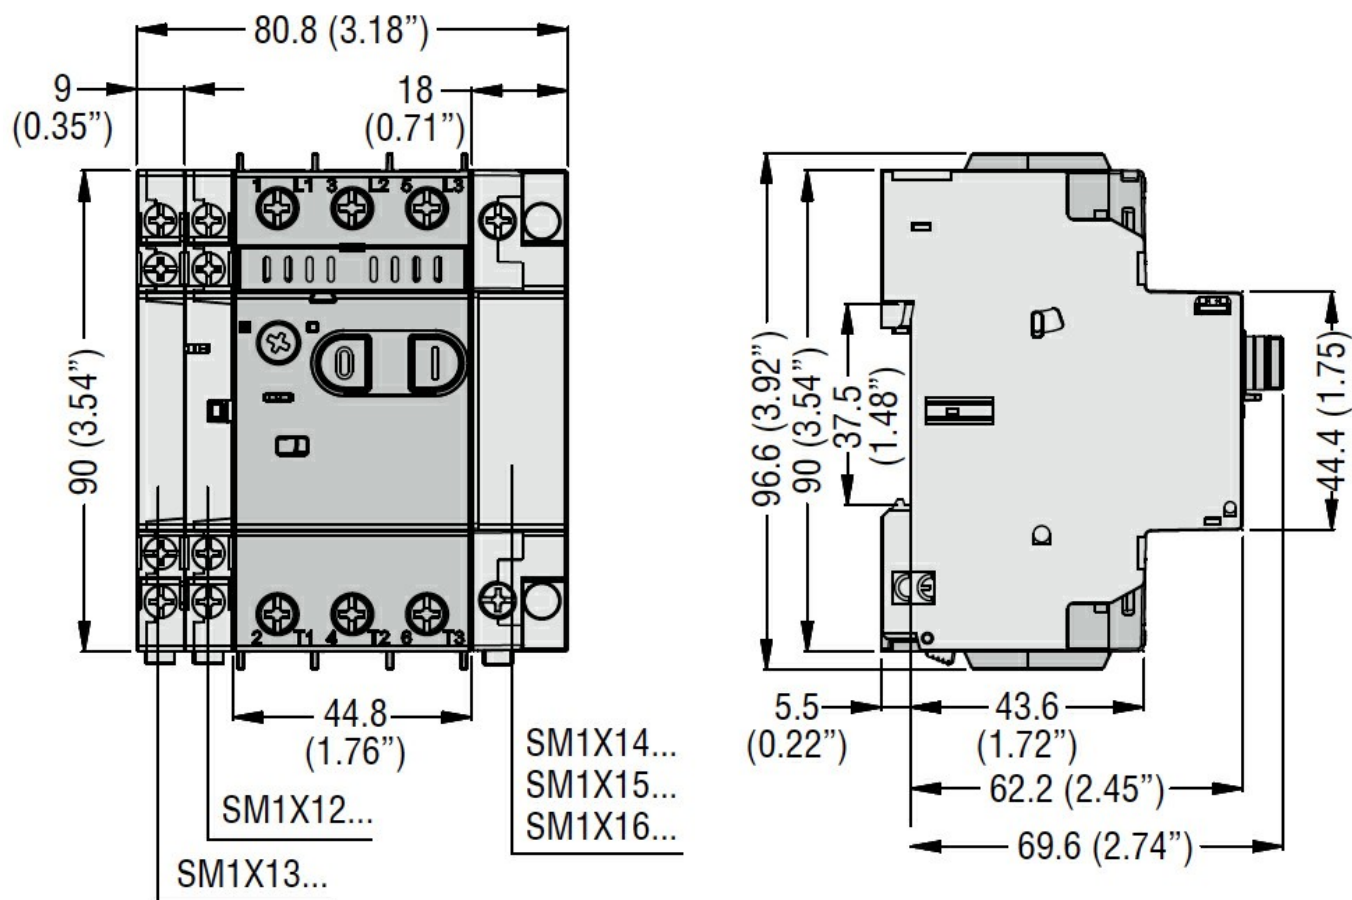

Wiring diagrams

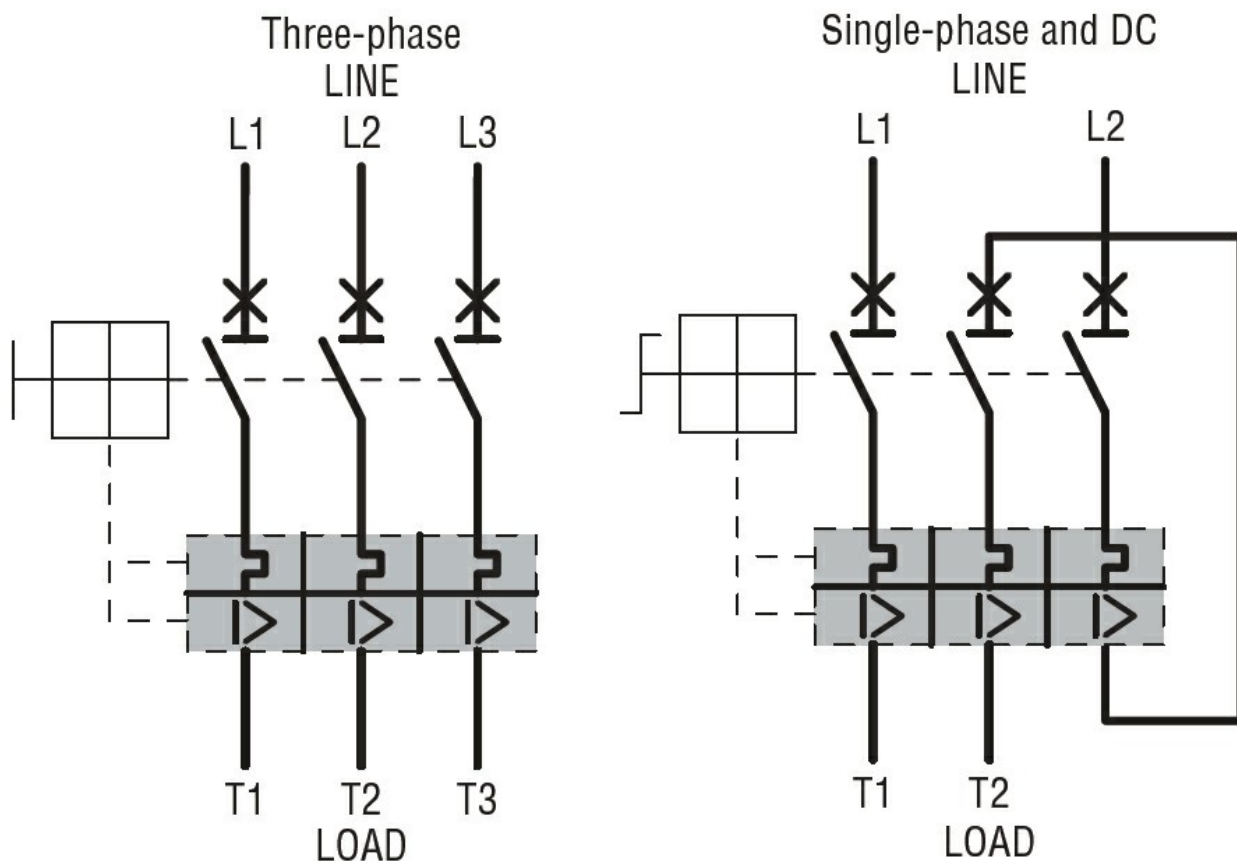

Certifications and compliance

Certifications	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-2
	IEC/EN 60947-4-1
	UL508
Compliance	cULus
	EAC

ETIM classification

ETIM 8.0	EC000074 - Motor protection circuit-breaker
----------	---