



Auxiliary contact characteristics

Rated insulation voltage Ui IEC/EN	V	690
Rated impulse withstand voltage Uimp	kV	4

Operational characteristics

Rated supply voltage AC	VAC	230
Rated frequency	Hz	50
In-rush consumption	VA	12
Holding consumption	VA	3.5
Release voltage	Us	35...70
Operating voltage	US	85...110

Mechanical features

Tightening torque for terminals	min	Nm	1
	max	Nm	1
	min	lbin	9
	max	lbin	9

Conductor section	AWG/Kcmil	min	18
		max	14
	Flexible w/o lug conductor section	min	mm ² 0.75
		max	mm ² 2.5
	Flexible c/w lug conductor section	min	mm ² 0.75
		max	mm ² 2.5

Operating position	normal allowable	Vertical Any
--------------------	---------------------	-----------------

Terminals	type screw width tool	mm 7.2 Ph2	Screw M3.5
-----------	--------------------------------	------------------	---------------

Weight	g	130
--------	---	-----

Operations


Mechanical life	cycles	100000
-----------------	--------	--------

Ambient conditions


Temperature	Operating temperature	min	°C	-20
		max	°C	+60
	Storage temperature	min	°C	-50
		max	°C	+80

Max altitude	m	3000
IEC degree of protection		IP20

Dimensions

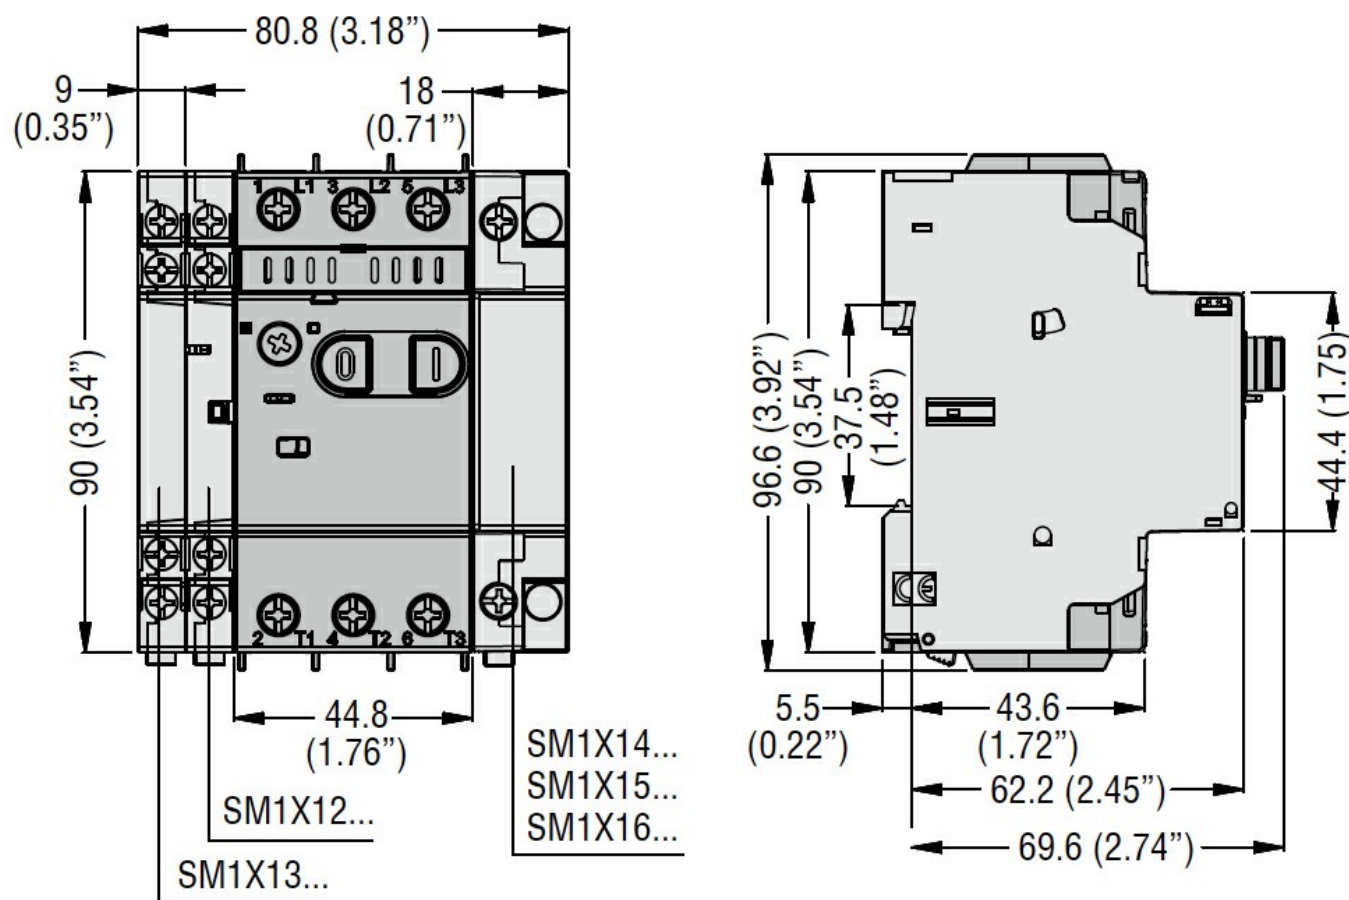

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

cULus
EAC

ETIM classification