



Mechanical features

Operating position

normal Other

Weight g 115

Operations

Mechanical life cycles 100000

Ambient conditions

Temperature

Operating temperature

min °C -20

max °C +60

Storage temperature


min °C -50

max °C +80

IEC degree of protection IP65

UL degree of protection 4X

Dimensions

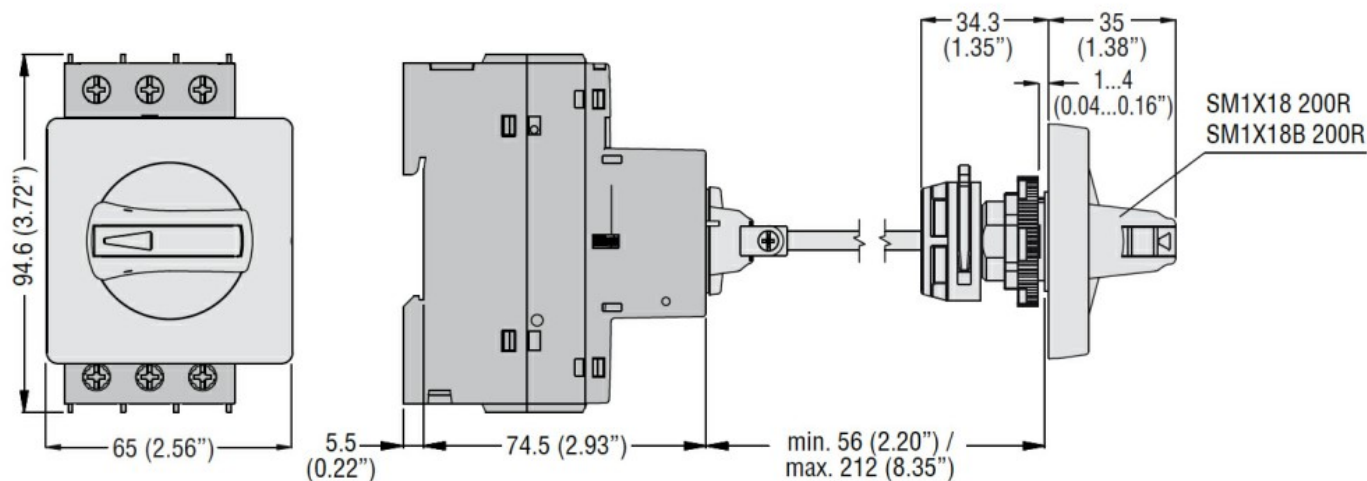

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification