




Mechanical features				
Weight		g		235
Operations				
Mechanical life			cycles	100000
Ambient conditions				
Temperature				
Operating temperature				
	min	°C		-25
	max	°C		+60
Storage temperature				
	min	°C		-50
	max	°C		+80
IEC degree of protection				IP65
UL degree of protection				4X
Dimensions				

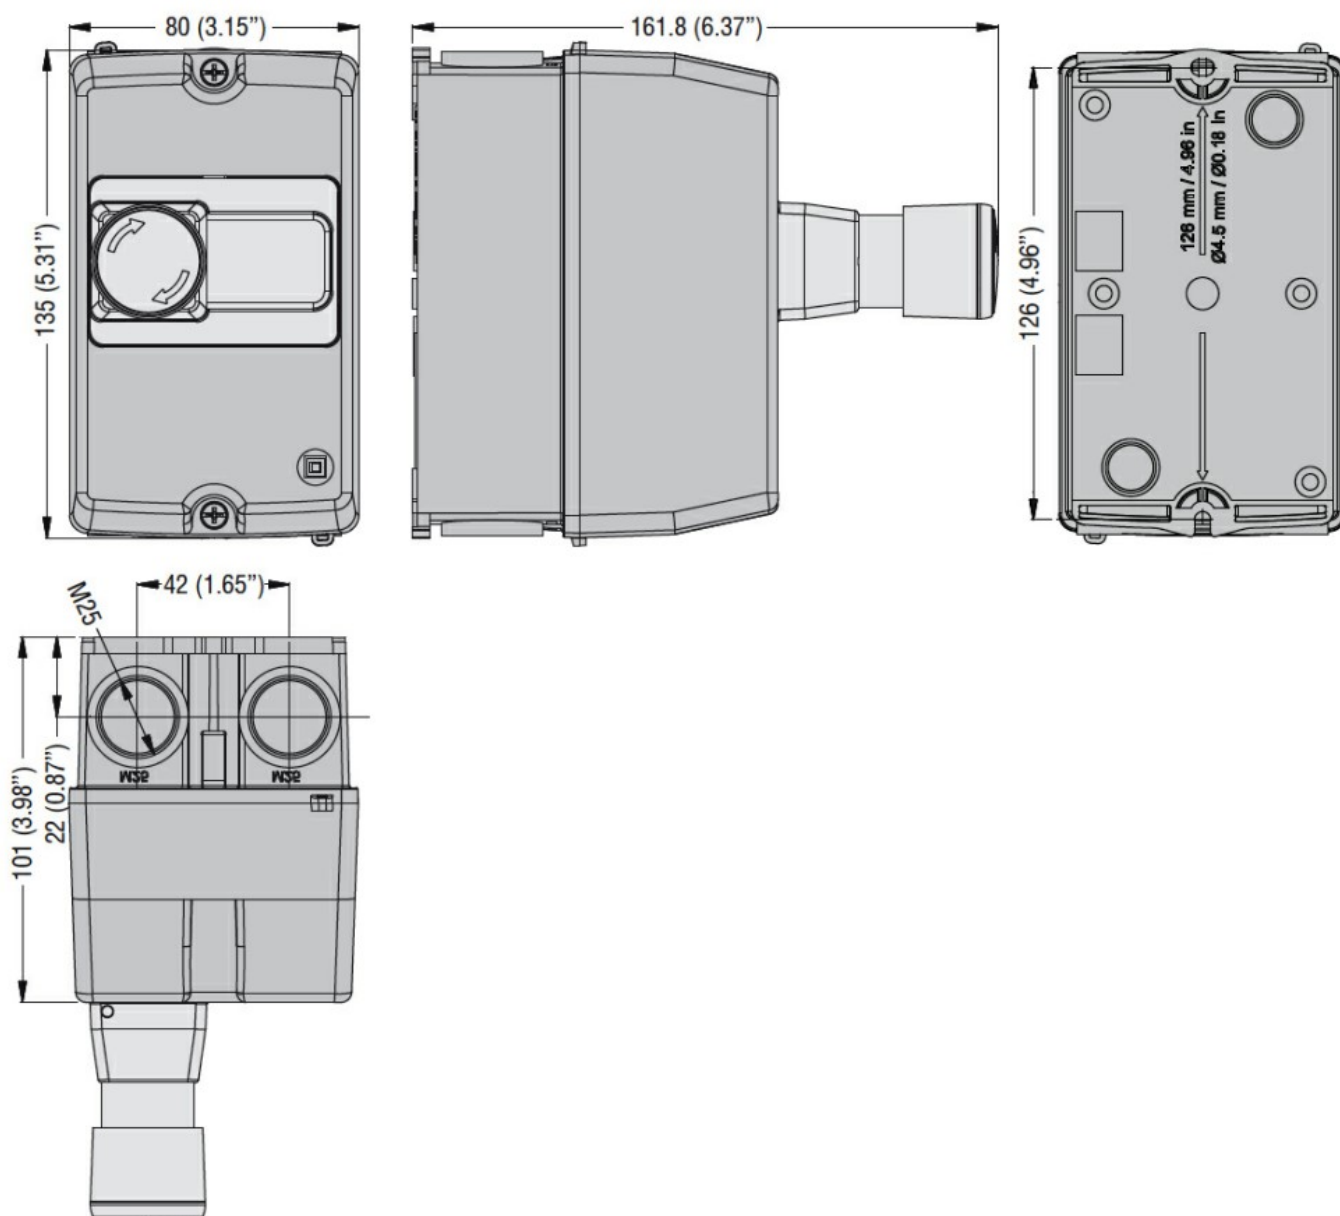

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

cULus
EAC

ETIM classification