




Mechanical features				
Weight		g		275
Operations				
Mechanical life			cycles	100000
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+60
	Storage temperature			
		min	°C	-50
		max	°C	+80
IEC degree of protection				IP65
UL degree of protection				4X
Dimensions				

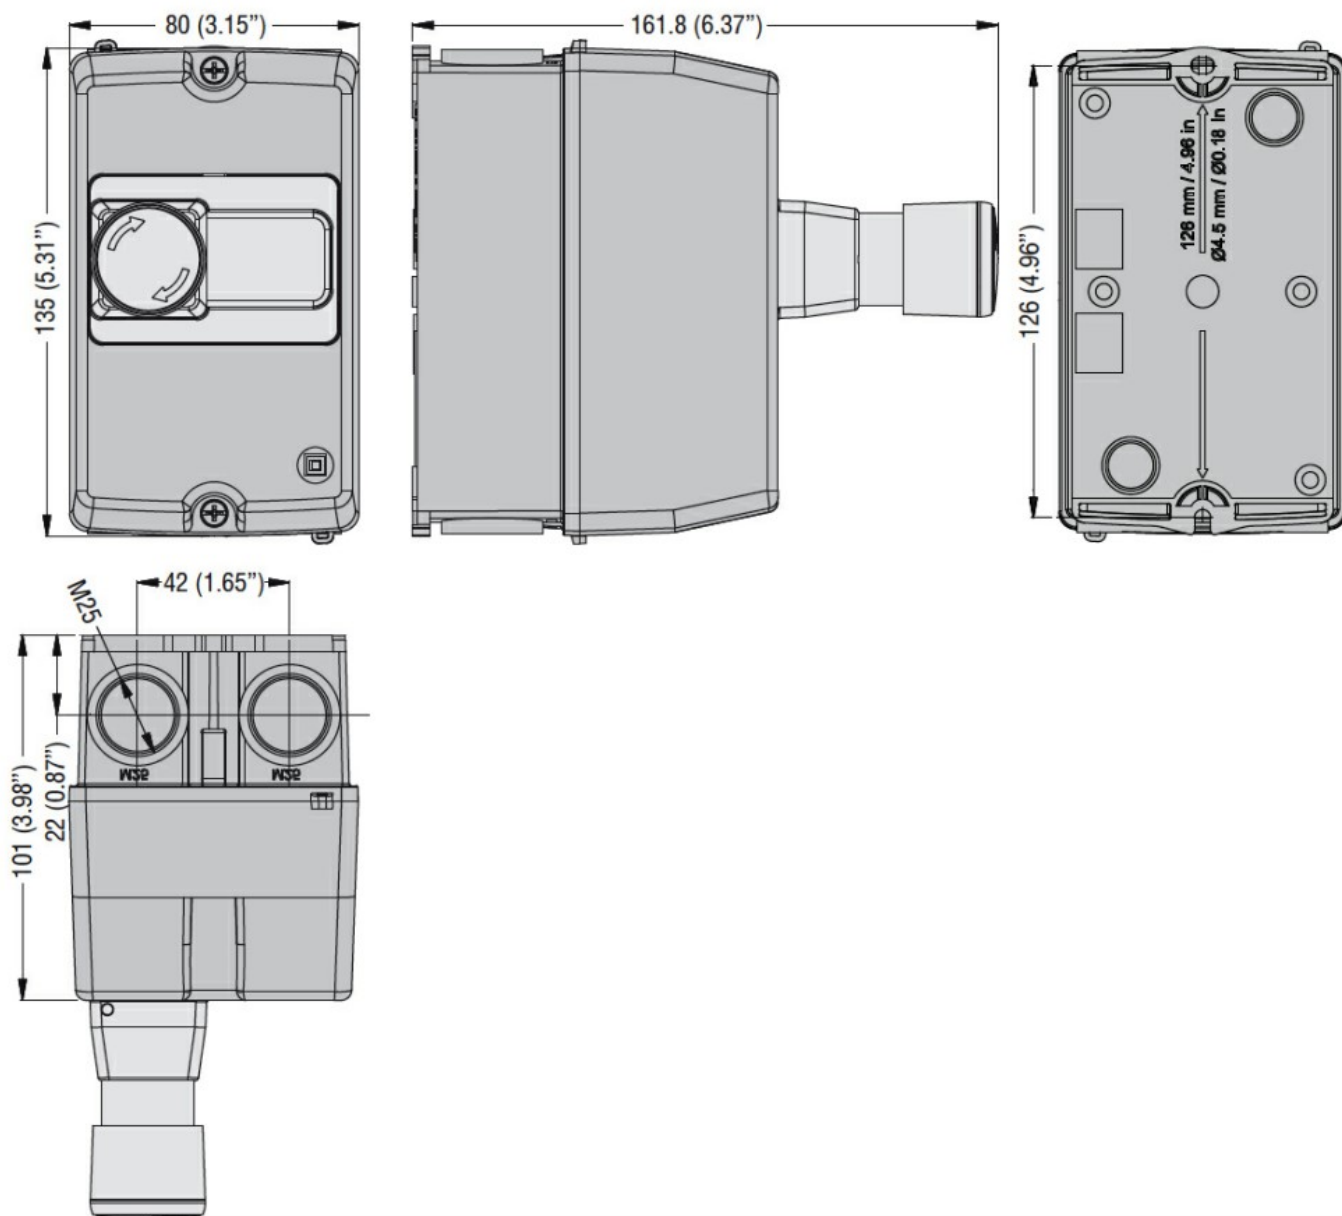

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification