




| Mechanical features      |     |        |  |        |
|--------------------------|-----|--------|--|--------|
| Weight                   |     | g      |  | 345    |
| Operations               |     |        |  |        |
| Mechanical life          |     | cycles |  | 100000 |
| Ambient conditions       |     |        |  |        |
| Temperature              |     |        |  |        |
| Operating temperature    |     |        |  |        |
|                          | min | °C     |  | -25    |
|                          | max | °C     |  | +60    |
| Storage temperature      |     |        |  |        |
|                          | min | °C     |  | -50    |
|                          | max | °C     |  | +80    |
| IEC degree of protection |     |        |  | IP65   |
| UL degree of protection  |     |        |  | 4X     |
| Dimensions               |     |        |  |        |

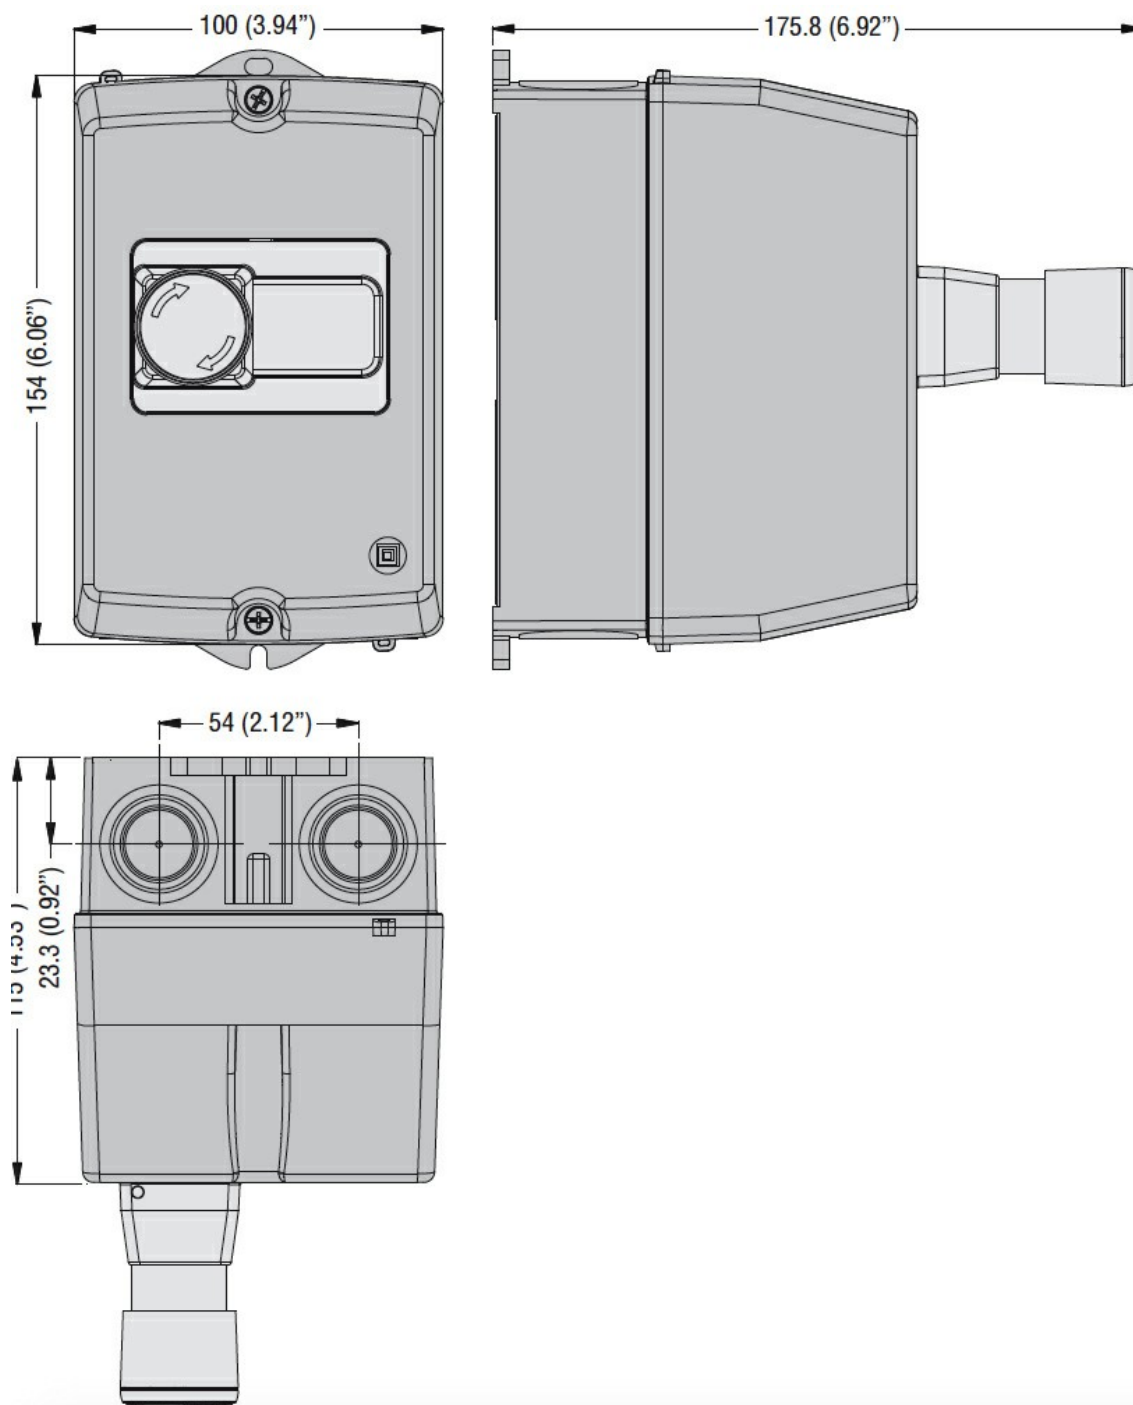

## Certifications and compliance

### Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

### Certificates

cULus

EAC

## ETIM classification