




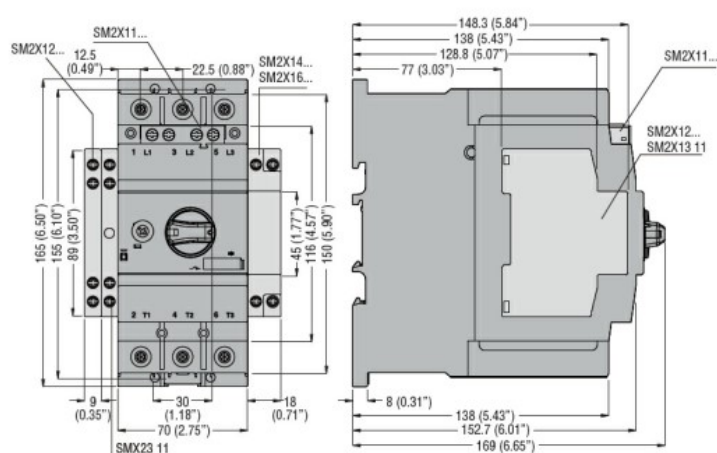

Auxiliary contact characteristics				
Rated insulation voltage Ui IEC/EN	V		690	
Rated impulse withstand voltage Uimp	kV		4	
Operational characteristics				
Rated supply voltage AC	VAC		24	
Rated frequency	Hz		50/60	
In-rush consumption	VA		20	
Operating voltage	US		70...110	
Mechanical features				
Tightening torque for terminals		min	Ibin	10
		max	Ibin	10
Conductor section				
AWG/Kcmil		min		18
		max		14
Flexible w/o lug conductor section		min	mm ²	0.75
		max	mm ²	2.5
Flexible c/w lug conductor section		min	mm ²	0.75
		max	mm ²	2.5
Operating position		normal		Vertical
		allowable		Any
Terminals		type		Screw
		tool		Pz2
Weight			g	100
Operations				
Mechanical life			cycles	100000
Ambient conditions				
Temperature				
Operating temperature		min	°C	-20
		max	°C	+70
Storage temperature		min	°C	-50
		max	°C	+80
Max altitude			m	3000
IEC degree of protection				IP20
Dimensions				

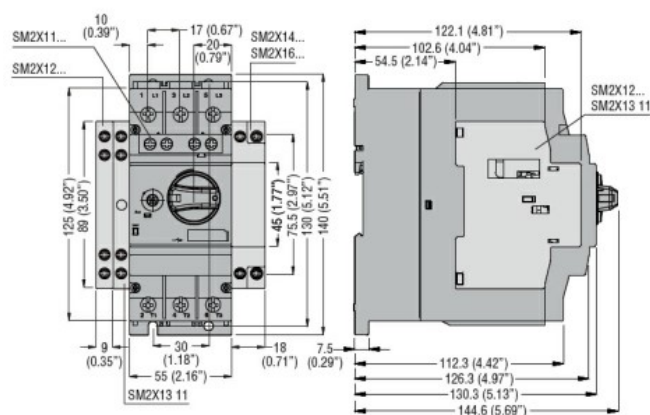

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification