




Safety parameters				
ISO 13849-1 security category			Cat. 4	
ISO 13849-1 performance level			PLe	
Mechanical features				
Fixing			Both directions	
Weight		g	26	
Ambient conditions				
Protection degree			IP67 and IP69K	
Temperature				
Operating temperature		min	°C	-25
		max	°C	+70
Storage temperature		min	°C	-25
		max	°C	+70
Dimensions				

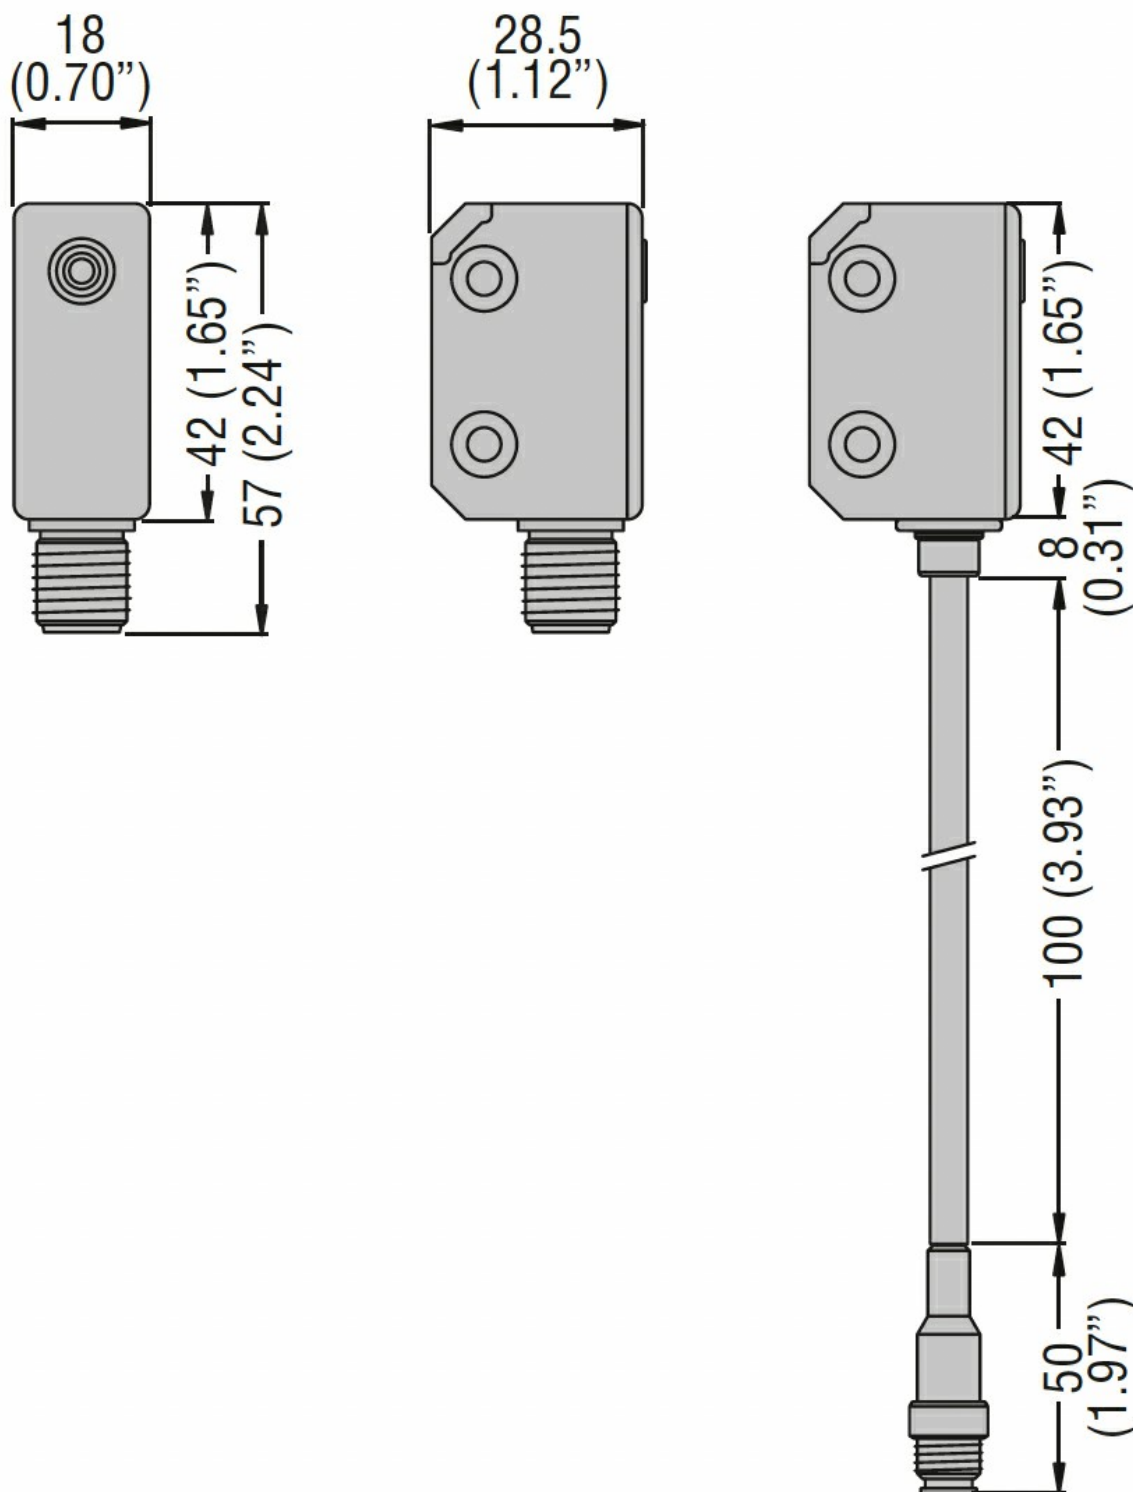

Certifications and compliance

Compliance

Cat. 4

EN/BS 61508-1(SIL 3)

EN/BS 61508-2 (SIL 3)

EN/BS 61508-3 (SIL3)

IEC/BS 62061 (max. SIL 3).

PLe according to EN/BS 13849-1

Certificates	
	cULus
	TÜV
ETIM classification	
ETIM 8.0	EC001449 - Device for monitoring of safety-related circuits